



DATE

JOB NAME

TYPE

Features	Applications
<ul style="list-style-type: none"> <li>Opal white concave lens; .125" thick</li> <li>Available for surface mounting or pendant stem</li> </ul>	<ul style="list-style-type: none"> <li>Office Areas</li> <li>Corridors</li> <li>Retail Stores</li> <li>Hospitals</li> </ul>

Series	Size	Lamping	Mounting	Options
PRD	2FT 3FT 4FT	T8 T5 T5HO <small>***SEE PAGE 2 FOR AVAILABLE LAMPING CONFIGURATIONS</small>	SM-Surface Mount PS-Pendant (24", 36") AC- Aircraft Cabel (36", 48")	EM- Emergency Pack DB- Dimming

Ordering Example: PRD-2FT-T5-P36"-UNV-EM

**Details**

**Application Features:** Specification grade, surface or pendant mount fixture with concave formed circular dome lens. For use in indoor applications where a fluorescent fixture is required.

**Construction:** Die formed and embossed, heavy gauge cold rolled steel housing. Spun steel trim.

**Finish:** Powder coated matte white.


**Electrical:** Integral driver and board set up.

**Approvals:** Union made, ETL listed, and manufactured in the US.


**Mounting:** Surface Mount or Pendant stem available-4 stems per fixture; Available 24" or 48" lengths.

**Optics:** .125" thick concave opal lens


**Options:** Emergency Battery Backup, Dimming Ballast, Separate Circuit




TOP VIEW

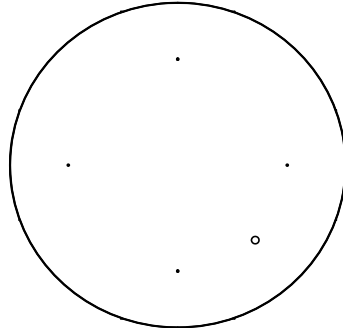


TOP VIEW

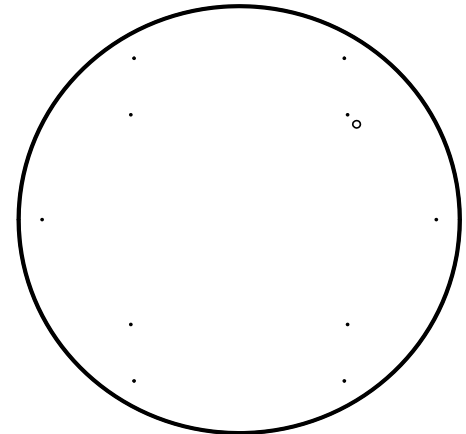


TOP VIEW




2FT ROUND PRD  
SURFACE/PENDENT  
SIDE VIEW




3FT ROUND PRD  
SURFACE/PENDENT  
SIDE VIEW




4FT ROUND PRD SURFACE/PENDENT  
SIDE VIEW




(1) T8U6 2FT LAMP

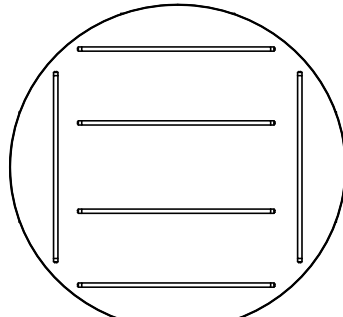


(6) T5/T5HO 2FT  
LAMPS




(2) BIAX LAMPS



(3) T8U6 2FT LAMP

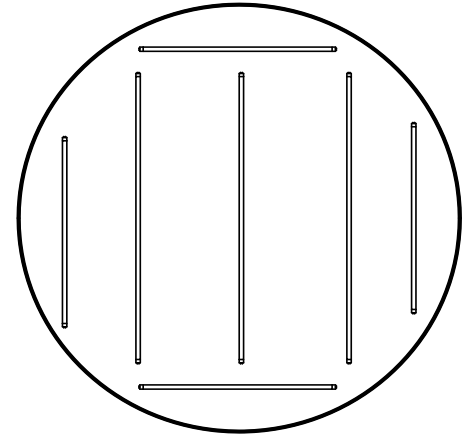


(4) T5 OR T5HO 2FT & (3) T5  
OR T5HO 3FT LAMPS

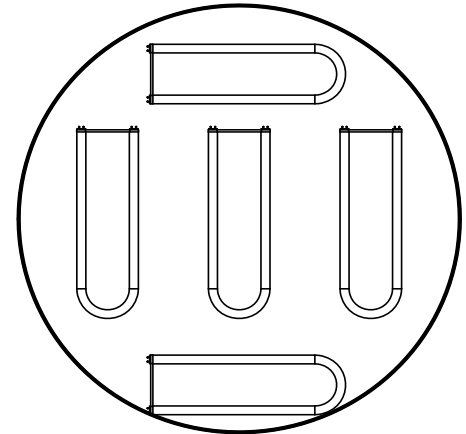


(5) T8U6 2FT LAMP

## PRD INSTALLATION SHEET

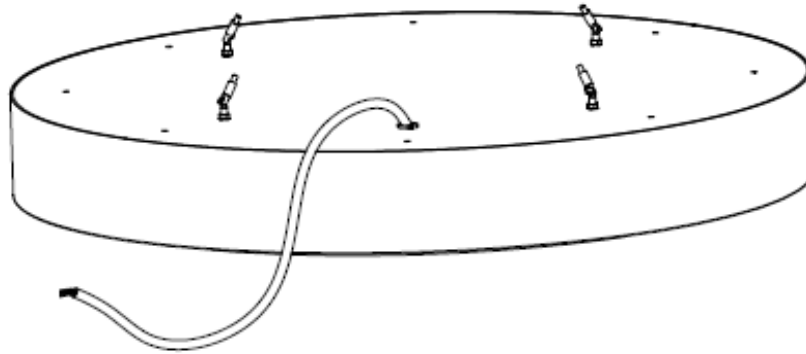


1. RRD SERIES IS SHIP WITH GRIPPERS AND POWER CORD ATTACH TO THE FIXTURE. (AS SHOWN ABOVE)

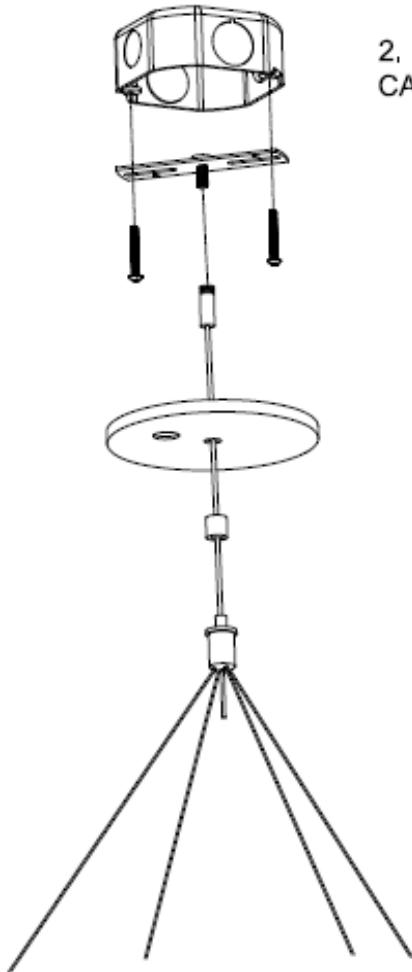


2. INSTALL CROSSBAR TO J-BOX WITH CANOPY KIT ATTACH, ( AS SHOWN HERE)

PRD INSTALLATION SHEET

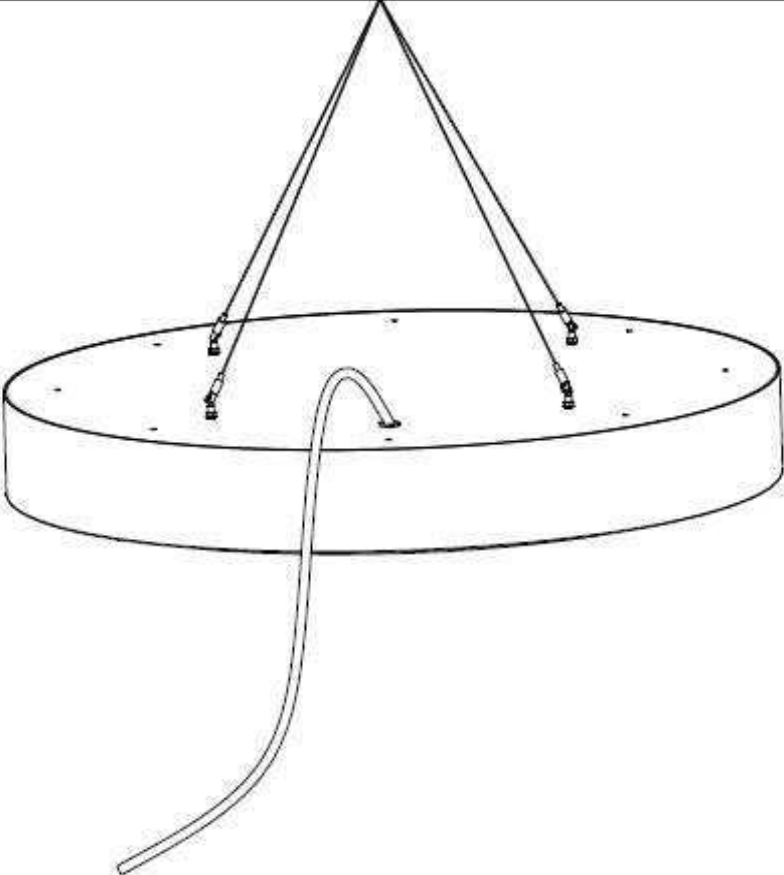

3. INSTALL ALL 4 CABLES TO EACH GRIPPER THAT IS ATTACH ON THE TOP OF THE FIXTURE. ONCE THAT IS COMPLETE, CONTRACTOR MUST LEVEL THE FIXTURE TO THE RIGHT HEIGHT.

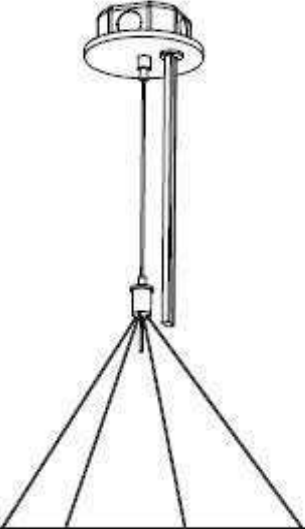

4. DO ELECTRICAL CONNECTIONS AND INSTALL GROMMET TO CANOPY. RAISE CANOPY TO J-BOX AND LOCK IN PLACE.

**DANGER**

⚡

Non-energized wiring. Contact will cause electric shock or fire. Only work on de-energized equipment. Stop work! Power before using this job.

**NOTICE**


Do not touch LED

May damage device

Observe precautions for handling and operation of this device.

Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation). To prevent electrical shock, disconnect electrical supply before installation or servicing.

PRD INSTALLATION SHEET

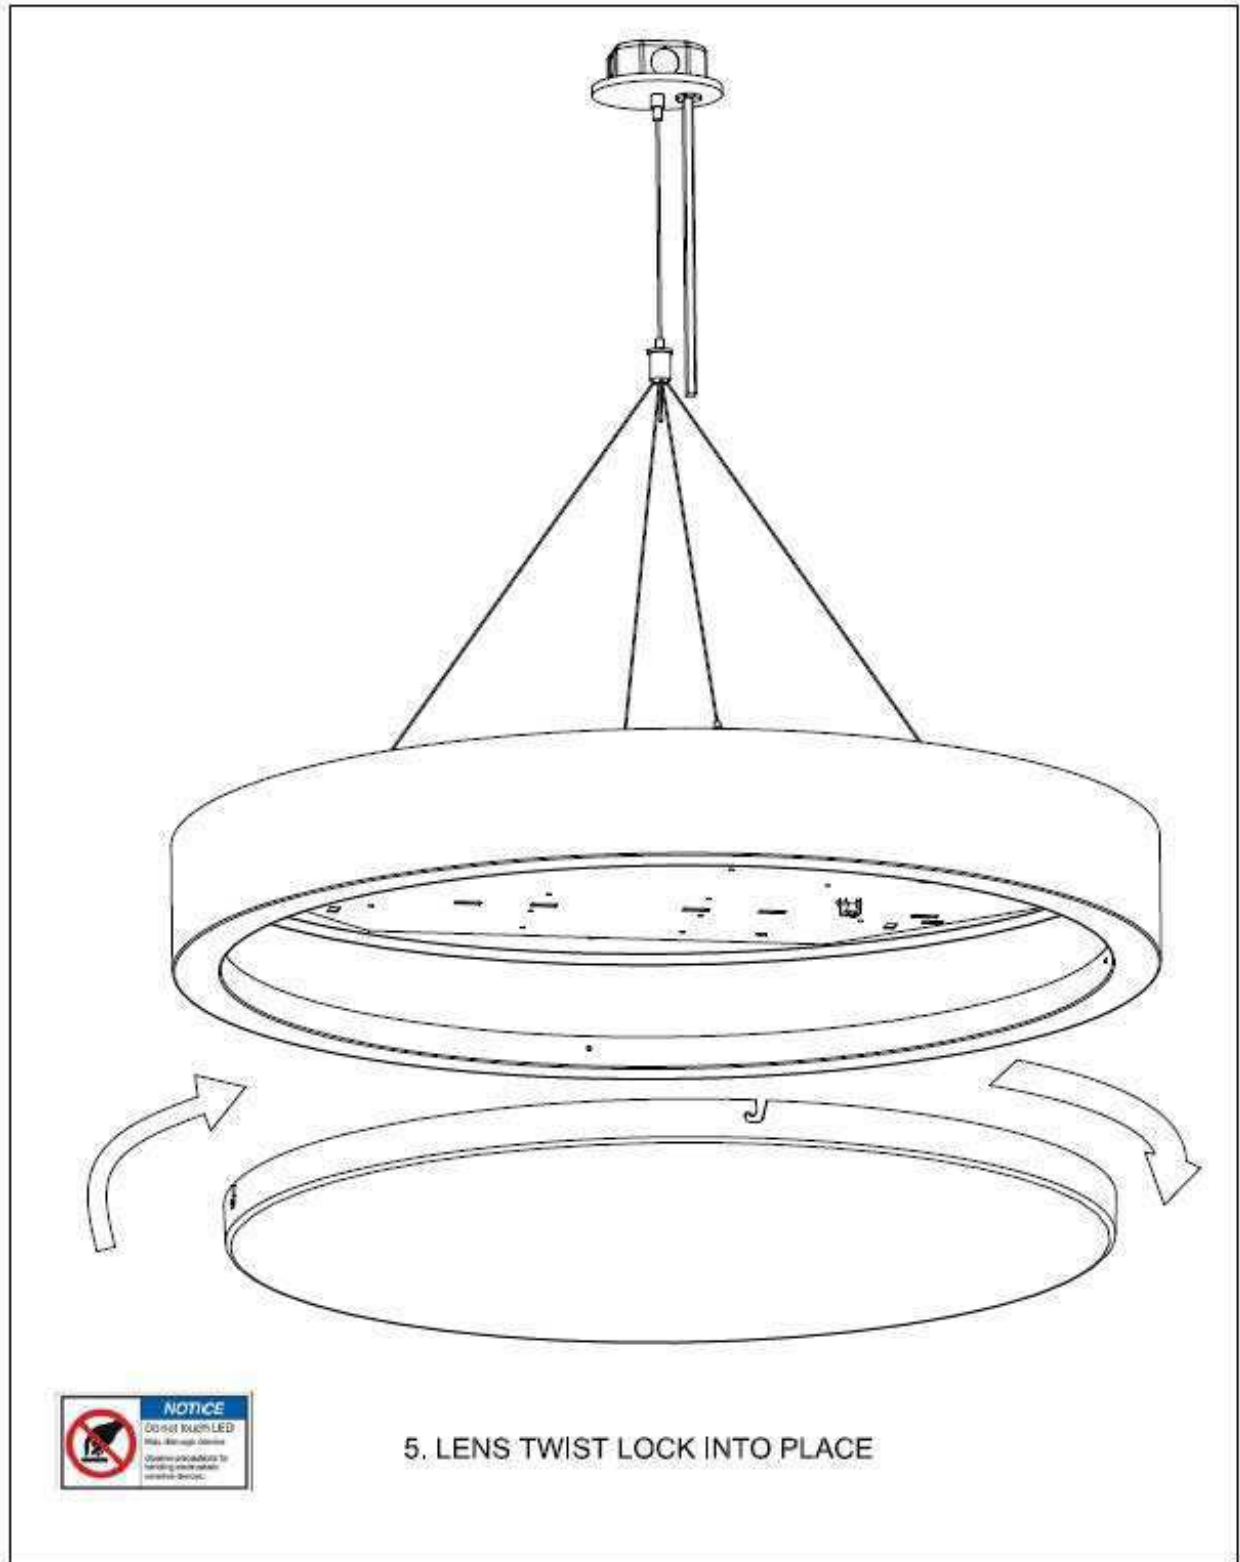

PRD INSTALLATION SHEET



INSTALLATION IS NOW COMPLETE  
NOTE: DIFFERENT FINISHES ARE AVAILABLE  
(SHOWN FINISH IS FIRE-ENGINE RED)