

DP LED

Vapor-tight LED luminaire with ribbed lens. For use in indoor applications where an LED luminaire with gasketing is required.



Features

- Glare-free lighting
- Available in custom lengths and long runs
- Damp Location Rated
- CRI Value: 80+; available in 90+
- 5 year, 50,000 hour lamp life Warranty
- 2700k, 3000k, 3500k, 4000k, and 5000k color temperatures available

Applications

- Offices
- Lobbies
- Retail Stores
- Classrooms
- Reception Areas
- Corridors

Details

Construction: One piece fiberglass housing with gasketed seals.

Optics: Linear frosted ribbed acrylic diffuser. Clear ribbed lens available.

Electrical: Integral driver with dimming. Several driver options available. See below for Lutron Dimming information:

- LTEA**=2-wire forward phase; Hi-lume 1% Dimming, only available for 120V.
- L3DA**=3-wire EcoSystem; Hi-lume 1% Dimming
- LDE1**=Digital EcoSystem; Hi-lume 1% Dimming, 'soft-on fade-to-black' (Required for Daylighting)
- LDE5**=5 Series EcoSystem; 5% Dimming.

Warranty: 5 year limited warranty; covers standard components.


Approvals: Union made, ETL listed, and manufactured in the US. IP65 and IP67 rated.

LED System Information

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	7.25W/ft	700Lm/ft	95Lm/W
Low (LTG2)	5W/ft	485Lm/ft	97Lm/W
High (LTG3)	8.75W/ft	805Lm/ft	92Lm/W

Please Note: Standard CRI is 80+, must specify for requests over 90. Outputs reflected in chart based on 4000K color temperature. For custom LED package requests consult factory; wattages vary based on specified output. Additional photometric information available.

Extrusion Dimensions

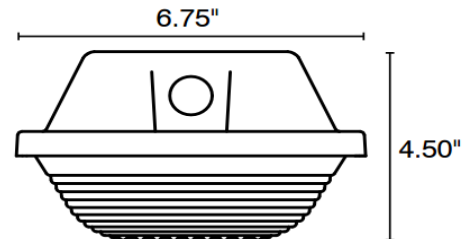

Ordering Information

DP LED

Series	Size	LED System	Color Temp	Voltage	Lens	Driver	Options
	2FT	LTG1- Standard	2700K	120	FR-Frosted Ribbed (standard)	DB- Standard 10% Dimming (0-10V)	EM-Emergency Pack
	4FT	LTG2- Low	3000K	277		DB1%-1% Dimming (0-10V)	MS- Motion Sensor
	8FT	LTG3- High	3500K	UNV	RB- Clear Ribbed	DB.01%-0.1% Dimming (0-10V)	MB- Mounting Bracket
		C- Custom Output (ie-C550Lm/ft)	4000K			LTEA*-Lutron 2-wire 1% Dimming	TP/SSL- Tamper Proof Screws with Stainless Steel Latches
			5000K			L3DA*-Lutron 3-wire 1% Dimming	90CRI- CRI of 90+
						LDE1*-Lutron Digital EcoSystem	
						LDE5*-5 Series EcoSystem; 5% Dimming	

*Refer to 'Electrical' Information Above

Ordering Example: DP LED-4FT-LTG1-4000K-UNV-FR-LTEA-EM