


DATE _____ PROJECT _____ FIRM _____ TYPE _____

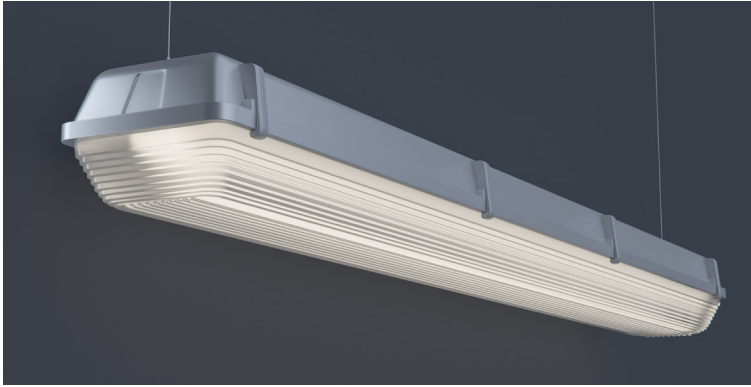

Vapor-tight LED luminaire with ribbed lens. For use in indoor applications where an LED luminaire with gasketing is required.

FEATURES

- Glare-Free Lighting
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors


CONSTRUCTION One Piece Fiberglass Housing with Gasketed Seals | **OPTICS** Linear Frosted Ribbed Acrylic Diffuser. Clear Ribbed Lens Available

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated |   | **DRIVERS & SENSORS** 

ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available | For Wiring Diagrams and Sensor Information Click [Here](#)

EXTRUSION DIMENSIONS

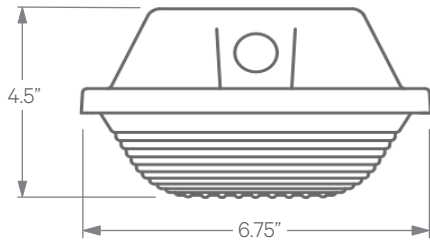

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	7.25 W/ft	703 lm/ft	97 LPW
Low (LTG2)	5 W/ft	550 lm/ft	98 LPW
High (LTG3)	10 W/ft	9,495 lm/ft	95 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING

1 - FIXTURE ID	2 - LENGTH	3 - COLOR TEMP	4 - LED SYSTEM	5 - VOLTAGE	6 - DRIVER
DP LED	2 - 2 ft 4 - 4 ft 8 - 8 ft	27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW** - RGB + 3000K <small>*Must use DMX or TW10 Driver **Must use DMX Driver</small>	LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	UNV - Universal (120/277V)	DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

7 - FINISH	8 - MOUNTING	9 - OTHER OPTIONS
W - White (Standard) CC - Custom Color (provide RAL#)	SM - Surface Mount	EM 120V - Emergency Pack EM 277V - Emergency Pack EMCKT - Emergency Circuit MB - Mounting Bracket TP/SSL - Tamper Proof Screws with Stainless Steel Latches RB - Clear Ribbed Lens

Updated: 05/23/2019