

DATE

JOB NAME

TYPE

Features **Applications**

- Single perforated metal lamp shield
- Translucent opal white acrylic overlay
- Clean appearance
- no exposed fasteners

- Office Areas
- Retail Stores
- Class Rooms
- Corridors

| Series | Size | LED System | Color Temp | Voltage | Mounting | Options |
|-----------------|------------|---|--|--|--|---|
| BPCW LED | 1x4 | LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Package (Consult Factory) | 3000K 3500K 4000K 5000K | 120 277 UNV | SM -Surface Mount PS - Pendant Stem | EM -EM Pack DB - Dimming* LDB3 - Lutron Dimming Driver (1% 3-wire control)* LDBD - Lutron Dimming Driver (1% Digital EcoSystem)* SC -Separate Circuit WH - Whips |

Ordering Example: BPCW LED-1X4-LTG2-4000K-UNV-SM-DB

LED System Information

Options:

| PACKAGE | SYSTEM WATTS | DELIVERED LUMENS |
|------------------------|--------------|------------------|
| LTG1 (STANDARD) | 58W | 5415Lm |
| LTG2 (LOW) | 53W | 4900Lm |
| LTG3 (HIGH) | 64W | 6210Lm |

Color Temperature Pro-rate:

| CCT | OUTPUT |
|-------|--------|
| 3000K | 95% |
| 3500K | 97% |
| 4000K | 100% |
| 5000K | 103% |

***FOR ANY CUSTOM LED PACKAGE REQUESTS CONSULT FACTORY

Details

Application Features: Premium grade, surface mounted, high performance direct/indirect architectural luminaire with single perforated metal lamp shield. For use in indoor applications where a LED luminaire with soft, low-glare illumination and modern styling is required.

Construction: Die formed and spot welded, heavy guage cold rolled steel housing. Diffuser held within hinged door frame, hinges from either side using steel pin hinges and is held in closed position by two positive cam latches. Ballast accessed through tool-less ballast cover. Sufficient knock-outs provided for optional pendant stems.


Electrical: Integral driver.

Approvals: Union made, ETL listed, and manufactured in the US.

Mounting: Surface mounts over electrical junction box or with optional pendant stems.

Optics: Contoured reflector and perforated shield with opal white acrylic overlay.

Options: Emergency Battery Backup, Dimming, and 6' Whips.

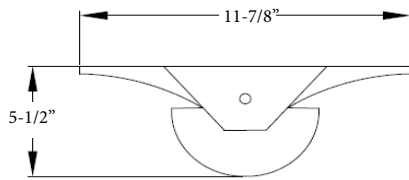

DISCLAIMER: CORONET INC RESERVES THE RIGHT TO MAKE ANY DESIGN CHANGES FOR CONTINUOUS IMPROVEMENT WHICH WILL NOT AFFECT THE OVERALL APPEARANCE OR PERFORMANCE. ALL CEILINGS ARE TO BE ADEQUATELY REINFORCED BY OTHERS BEFORE INSTALLATION. ALL FIXTURES ARE TO BE WIRED BY A CERTIFIED ELECTRICIAN ONLY. THIS INFORMATION IS PROPERTY OF CORONET INC., AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT ANY WRITTEN CONSENT OF CORONET INC.