




DATE _____ PROJECT _____ FIRM _____ TYPE _____




Specification grade, surface mounted luminaire with drum style opal white acrylic diffuser. For use in indoor applications where a compact LED luminaire with soft, low-glare illumination is required.

FEATURES

- Dome Style Diffuser Optionally Available
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS	Schools, Retail Stores, Office Areas, Corridors, Bathrooms, Utility Areas		
CONSTRUCTION	Regressed Metal Housing Provides a Floating Appearance	OPTICS	Drum Style Opal White Acrylic Diffuser. Dome Style Available
WARRANTY	5 Year Limited Warranty (Covers Standard Components)	FINISH	Standard Powder-Coated White. Custom RAL Colors Available
FIXTURE RATINGS & CERTIFICATIONS	Union Made ETL Listed	Made In The USA Damp Location Rated	 
ELECTRICAL	Integral Driver with 0-10V Dimming Standard. Several Driver Options Available		DRIVERS & SENSORS For Wiring Diagrams and Sensor Information Click Here 

EXTRUSION DIMENSIONS

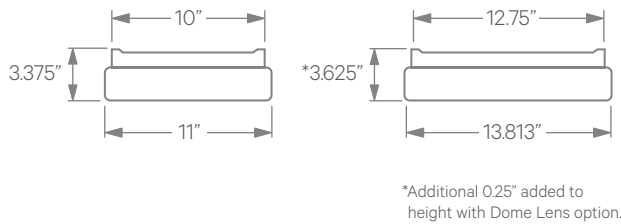

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
11" Fixture	17 W	1,278 lm
14" Fixture	22 W	1,704 lm

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

1 - FIXTURE ID	2 - LENGTH	3 - COLOR TEMP	4 - LED SYSTEM	5 - VOLTAGE	6 - DRIVER
CRPL LED	11 - 11 inches 14 - 14 inches	30 - 3000K/90 CRI 40 - 4000K/90 CRI TW* - Tunable White RGBW** - RGB+3000K <small>*Must use DMX or TW10 Driver **Must use DMX Driver</small>	LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	UNV - Universal (120/277V)	DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)
7 - FINISH	8 - MOUNTING	9 - CIRCUIT (Optional)	10 - OTHER OPTIONS		
W - White (Standard) CC - Custom Color (provide RAL#)	SM - Surface Mount	EM 120V - Emergency Pack EM 277V - Emergency Pack	WH6 - 6ft Whips Preinstalled DO - Dome Style Lens		