

DATE _____

JOB NAME _____

TYPE _____

Features **Applications**

- | | |
|---|---|
| <ul style="list-style-type: none"> • Single diffuser • Shallow design • Clean appearance, no exposed fasteners | <ul style="list-style-type: none"> • Office Areas • Retail Stores • Class Rooms • Corridors |
|---|---|

| Series | Size | LED System | Color Temp | Voltage | Mounting | Options |
|-----------------|------------|---|--|--|--|---|
| KSR1 LED | 2x4 | | | | | |
| | | LTG1- Standard LTG2- Low LTG3- High C- Custom Package (ie-C5000Lm) | 2700K 3000K 3500K 4000K 5000K | 120 277 UNV | F- Flange NT- No Trim (spackle flange) T- Tee Grid* SG- Slot Grid | EM- Emergency Pack DB- Standard 10% Dimming Driver (0-10V) DB1% - 1% Dimming Driver (0-10V) LUTRON 2- Hi-Lume Dimming Driver (1% 2-wire control) LUTRON 3- Hi-Lume Dimming Driver (1% 3-wire control) AR- Air Return |

Ordering Example: KSR1 LED-2X4-LTG1-3500K-UNV-SM-MS

*Standard Tee is 9/16". **Must** specify if 15/16"

LED System Information

Options:

| NOMINAL PACKAGE | NOMINAL SYSTEM WATTS | NOMINAL DELIVERED LUMENS |
|------------------------|----------------------|--------------------------|
| LTG1 (STANDARD) | 58W | 5925Lm |
| LTG2 (LOW) | 53W | 5360Lm |
| LTG3 (HIGH) | 64W | 6555Lm |

Color Temperature Pro-rate:

| CCT | OUTPUT |
|-------|--------|
| 2700K | 93% |
| 3000K | 95% |
| 3500K | 97% |
| 4000K | 100% |
| 5000K | 103% |

***FOR ANY CUSTOM LED PACKAGE REQUESTS CONSULT FACTORY

Details

Application Features: Premium grade, recessed, high performance direct/indirect architectural luminaire with single perforated metal lamp shield and translucent acrylic diffuser For use is indoor applications where a LED luminaire with soft, low-glare illumination and modern styling is required. Available in 2x2 and 2x4 configurations. Shallow design accommodates mounting in obstructed ceiling plenums.

Construction: Die formed and spot welded, 20 ga. cold rolled steel housing with precision formed, cold rolled steel reflector and die formed cold rolled steel perforated lamp shield with translucent acrylic diffuser. Sufficient knock-outs provided on back of housing for flexible conduit attachment.


Electrical: Integral Driver.

Approvals: UL Listed for damp location.

Mounting: Recessed mounting for T-Bar, Slot Grid or with Flange Kit for sheetrock ceiling installations.

Optics: Arched reflector and translucent acrylic diffuser.

Options: Emergency Battery Backup, Dimming Ballast, Separate Circuit, Diffuser Only, Shallow Parabolic Louver, Air Supply/Return Slots, 6' Whips.

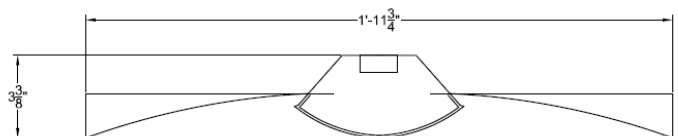

CROSS SECTION

DISCLAIMER: CORONET INC RESERVES THE RIGHT TO MAKE ANY DESIGN CHANGES FOR CONTINUOUS IMPROVEMENT WHICH WILL NOT AFFECT THE OVERALL APPEARANCE OR PERFORMANCE. ALL CEILINGS ARE TO BE ADEQUATELY REINFORCED BY OTHERS BEFORE INSTALLATION. ALL FIXTURES ARE TO BE WIRED BY A CERTIFIED ELECTRICIAN ONLY. THIS INFORMATION IS PROPERTY OF CORONET INC., AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT ANY WRITTEN CONSENT OF CORONET INC.