


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

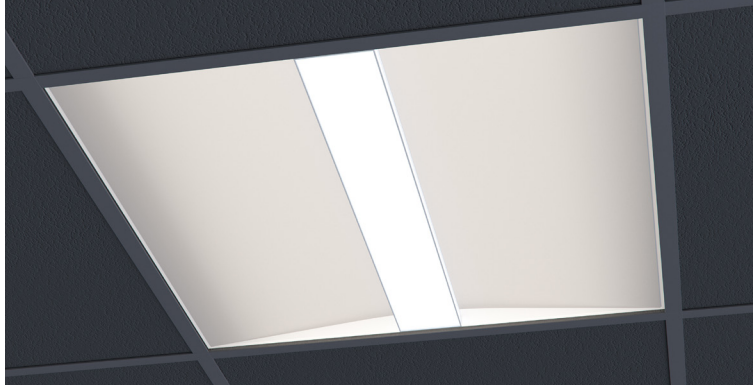

Recessed, architectural luminaire with frosted acrylic diffuse lenses. Durable steel housing. Suitable for grid and sheetrock ceilings. Custom outputs available.

### FEATURES

- Custom Outputs Available
- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Enlighted/Wattstopper Sensors Available

**APPLICATIONS** Offices, Lobbies, Retail Stores, Reception Areas & Corridors

**CONSTRUCTION** Heavy Gauge Cold Rolled Steel Housing | **OPTICS** Two Outer And One Center Frosted Acrylic Lenses

**WARRANTY** 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White


**FIXTURE RATINGS & CERTIFICATIONS** Union Made ETL Listed | Made In The USA Damp Location Rated



**ELECTRICAL** Integral Driver With 0-10V 10% Dimming Standard. Several Driver Options Available. See Below For Lutron Dimming Information

2-Wire Forward Phase; Hi-Lume 1% Dimming, Only Available For 120V	.....	LTEA
3-Wire EcoSystem; Hi-Lume 1% Dimming	.....	L3DA
Digital EcoSystem; Hi-Lume 1% Dimming, 'Soft-on Fade-to-black' (Required for Daylighting)	.....	LDE1
5 Series EcoSystem; 5% Dimming	.....	LDE5

### EXTRUSION DIMENSIONS

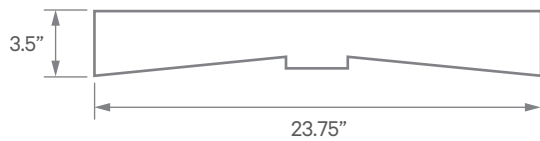

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	29 W	2,795 Lm/ft	96 Lm/W
Low (LTG2)	20 W	2,050 Lm/ft	101 Lm/W
High (LTG3)	35 W	3,245 Lm/ft	92 Lm/W

Based on a 4000K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

**ORDERING**

1	2	3	4	5	6	7	8	9	10	11
---	---	---	---	---	---	---	---	---	----	----

<b>1 - FIXTURE ID</b> TDJA LED	<b>2 - LENGTH</b> 2 X 2	<b>3 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	<b>4 - COLOR TEMP</b> 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K *Must use DMX Driver (Remote)	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER</b> DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA* - Lutron 2-wire 1% Dimming L3DA* - Lutron 3-wire 1% Dimming LDE1* - Lutron Digital EcoSystem LDE5* - 5 Series EcoSystem; 5% Dimming DMX - For Color Tuning and RGBW *Refer to 'Electrical' Information Above
-----------------------------------	----------------------------	---	---	--	---

<b>7 - FINISH</b> W - White (Standard)	<b>8 - MOUNTING</b> T - 9/16" Tee Grid T15 - 15/16" Tee Grid F - Flange SG - Slot Grid/Interlude	<b>9 - OPTICS</b> SD - Standard Diffuser	<b>10 - CONTROL</b> NC - No Control (Standard) EIS - Integral Sensor by Enlighted WIS - Integral Sensor by Wattstopper	<b>11 - OPTIONS</b> WH - 6 ft Whip, Preinstalled AR - Air Return EM 120V - Emergency Pack EM 277V - Emergency Pack
---	--	---	---	--