



DATE	PROJECT	FIRM	TYPE
------	---------	------	------

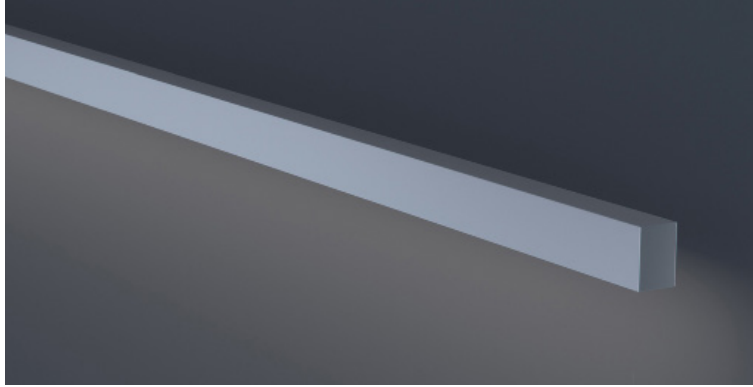


Architectural luminaire with very low profile. LED luminaire that provides continuous downlight regardless of length. Custom outputs and colors available.

### FEATURES

- Available In Custom Lengths & Long Runs To 1/16" Accuracy
- Corners & Patterns Available (See Page 2)
- 100% Downlight
- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K and 3500K Color Temperatures Available

<b>APPLICATIONS</b>	Offices, Reception Areas & Corridors			
<b>CONSTRUCTION</b>	Extruded Aluminum Housing With Die Cast Aluminum End Caps	<b>OPTICS</b>	Acrylic Diffuse Lens	
<b>WARRANTY</b>	5 Year Limited Warranty (Covers Standard Components)		<b>FINISH</b>	Standard Powder-Coated White. Custom RAL Colors Available
<b>FIXTURE RATINGS &amp; CERTIFICATIONS</b>	Union Made ETL Listed	Made In The USA Damp Location Rated		
<b>ELECTRICAL</b>	0-10V Remote Driver with 10% Dimming			

### EXTRUSION DIMENSIONS

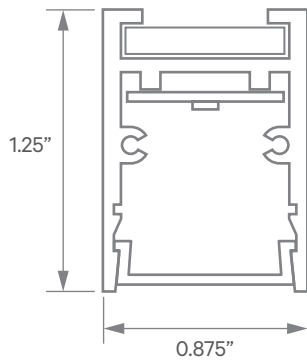

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	5.25 W/ft	445 Lm/ft
Low (LTG2)	3.5 W/ft	300 Lm/ft
High (LTG3)	7.25 W/ft	685 Lm/ft

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

### ORDERING



<b>1 - FIXTURE ID</b> RUSH LED DN	<b>2 - LENGTH</b> 4 - 4 ft 8 - 8 ft x'-x" - Custom (specify length)  **Patterns available, consult factory	<b>3 - COLOR TEMP</b> 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K  *Must use DMX Driver (Remote)	<b>4 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C3500Lm)	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER</b> DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DMX - For Color Tuning and RGBW
<b>7 - FINISH</b> W - White (Standard) CC - Custom Color (provide RAL#)	<b>8 - MOUNTING</b> AC - Air Craft Cable (50") SM - Surface Mount	<b>9 - OPTIONS</b> EM 120V - Emergency Pack EM 277V - Emergency Pack			

DATE


PROJECT

FIRM


TYPE

## CORNERS & PATTERNS

Available with illuminated corners, angles, and custom patterns. **Must consult factory for custom corners and patterns.**




Square Patterns



T Patterns




Custom Angles




Custom Patterns

## LENS CUT OPTIONS



Straight-cut



Mitered Angle

**NOTE:** Straight-Cut is standard configuration, Mitered Angle is optional and must be specified.


DATE

PROJECT

FIRM

TYPE


## PHOTOMETRICS

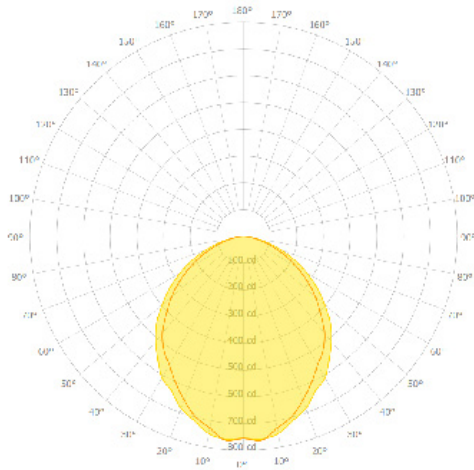

**RUSH LED DN 4FT LTG1 3500K**  
 DELIVERED LUMENS: 1,785Lm  
 TOTAL WATTS: 21W

### ZONAL LUMEN SUMMARY


ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	558.53	17.68	31.27
0.00 - 40.00	891.18	28.21	49.90
0.00 - 60.00	1494.22	47.29	83.67
0.00 - 90.00	1785.87	56.52	100.00
90.00 - 120.00	0.51	0.02	0.03
90.00 - 150.00	0.51	0.02	0.03
90.00 - 180.00	0.51	0.02	0.03
0.00 - 180.00	1785.87	56.52	100.00

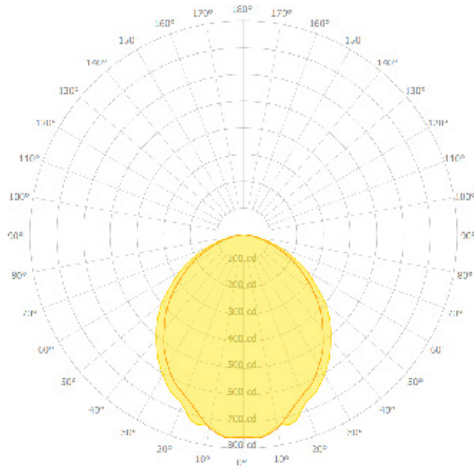

**RUSH LED DN 4FT LTG2 3500K**  
 DELIVERED LUMENS: 1,199Lm  
 TOTAL WATTS: 14W

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	373.85	17.65	31.17
0.00 - 40.00	597.45	28.21	49.82
0.00 - 60.00	1003.62	47.38	83.69
0.00 - 90.00	1199.26	56.62	100.00
90.00 - 120.00	0.37	0.02	0.03
90.00 - 150.00	0.37	0.02	0.03
90.00 - 180.00	0.37	0.02	0.03
0.00 - 180.00	1199.26	56.62	100.00

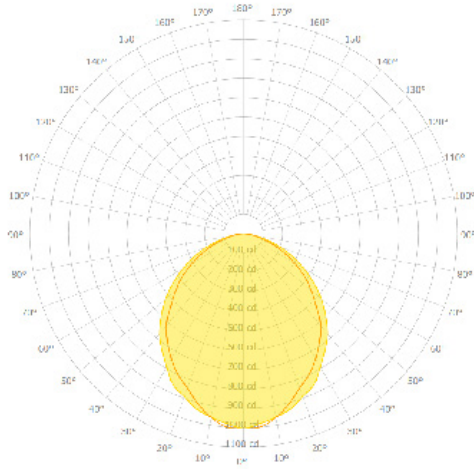

**RUSH LED DN 4FT LTG3 3500K**  
 DELIVERED LUMENS: 2,341Lm  
 TOTAL WATTS: 29W

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	732.33	17.70	31.27
0.00 - 40.00	1168.28	28.23	49.89
0.00 - 60.00	1960.57	47.37	83.72
0.00 - 90.00	2341.59	56.58	99.99
90.00 - 120.00	0.35	0.01	0.01
90.00 - 150.00	0.35	0.01	0.01
90.00 - 180.00	0.35	0.01	0.01
0.00 - 180.00	2341.93	56.59	100.00