


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

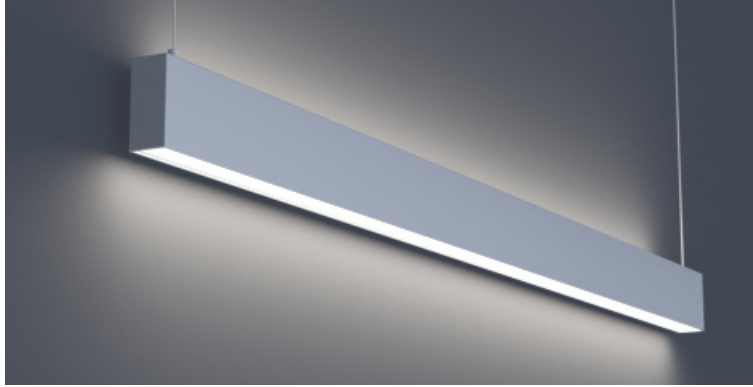

Narrow, linear luminaire with direct and indirect lighting. For use in indoor applications where an LED luminaire with very narrow profile providing continuous light is required.

### FEATURES

- Available In Custom Lengths & Long Runs To 1/16" Accuracy
- Optional 'Power Over Wire' System
- Corners & Patterns Available (See Page 2)
- Damp Location Rated
- CRI 90+ Standard
- 5 Year Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Rated Life- 100,000 hours at L70; 50,000 hours at L90

<b>APPLICATIONS</b>	Offices, Reception Areas & Corridors
---------------------	--------------------------------------

<b>CONSTRUCTION</b>	Extruded Aluminum Housing With Die Cast Aluminum End Caps	<b>OPTICS</b>	Acrylic Diffuse Lens Direct, Opal White Film Indirect
---------------------	---	---------------	---


<b>WARRANTY</b>	5 Year Limited Warranty (Covers Standard Components)	<b>FINISH</b>	Standard Powder-Coated White. Custom RAL Colors Available
-----------------	--	---------------	---

<b>FIXTURE RATINGS &amp; CERTIFICATIONS</b>	Union Made ETL Listed	Made In The USA Damp Location Rated
---	--------------------------	--



<b>ELECTRICAL</b>	Remote Driver With 0-10V 10% Dimming Standard. Several Driver Options Available. See Below For Lutron Dimming Information
	2-Wire Forward Phase; Hi-Lume 1% Dimming, Only Available For 120V ..... LTEA
	3-Wire EcoSystem; Hi-lume 1% Dimming ..... L3DA
	Digital EcoSystem; Hi-lume 1% Dimming, 'Soft-on Fade-to-black' (Required for Daylighting) ..... LDE1
	5 Series EcoSystem; 5% Dimming ..... LDE5

### EXTRUSION DIMENSIONS



### LED SYSTEM INFORMATION

	Nominal System Watts		Nominal Delivered Lumens	
	DIRECT	INDIRECT	DIRECT	INDIRECT
Standard (LTG1)	5.25 W/ft	5.25 W/ft	450 Lm/ft	600 Lm/ft
Low (LTG2)	3.5 W/ft	3.5 W/ft	300 Lm/ft	400 Lm/ft
High (LTG3)	7.25 W/ft	7.25 W/ft	600 Lm/ft	775 Lm/ft

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

<b>ORDERING</b>	1	2	3	4	5	6	7	8	9
-----------------	---	---	---	---	---	---	---	---	---

<b>1 - FIXTURE ID</b> RUSH UP/DN	<b>2 - LENGTH</b> 4 - 4 ft 8 - 8 ft x'-x" - Custom (specify length)  **Patterns available, consult factory	<b>3 - COLOR TEMP</b> 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K  *Must use DMX Driver (Remote)	<b>4 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER</b> DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA* - Lutron 2-wire 1% Dimming L3DA* - Lutron 3-wire 1% Dimming LDE1* - Lutron Digital EcoSystem LDE5* - 5 Series EcoSystem; 5% Dimming *Refer to 'Electrical' Information Above DMX - For Color Tuning and RGBW
<b>7 - FINISH</b> W - White (Standard) CC - Custom Color (provide RAL#)	<b>8 - MOUNTING</b> AC - Air Craft Cable (50") ACP - Power Over Aircraft Cable	<b>9 - OPTIONS</b> SC - Separate Circuit EM 120V - Emergency Pack (Remote) EM 277V - Emergency Pack (Remote)			

DATE


PROJECT

FIRM


TYPE

## CORNERS & PATTERNS


Available with illuminated corners, angles, and custom patterns. **Must consult factory for custom corners and patterns.**




Square Patterns



T Patterns (Unlit Intersection)



Custom Angles




Custom Patterns

## ACP- 'Power Over Air Craft Cable' Option:

### Individual Separate Circuit (Up to 8ft Only)



### Continuous Runs

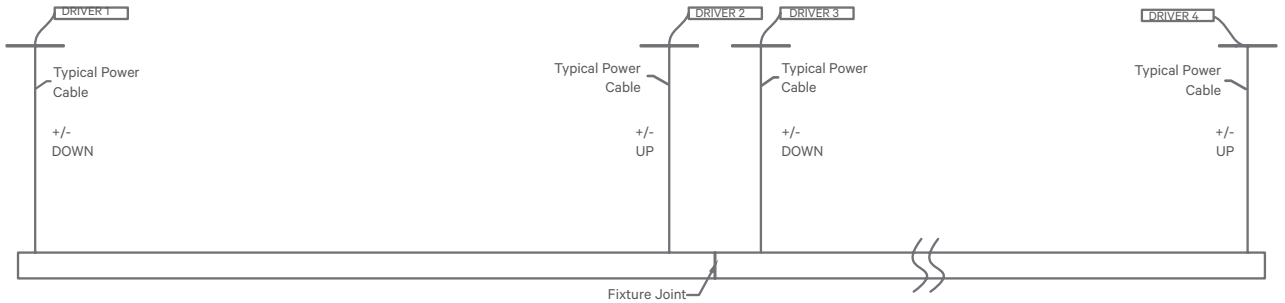


DATE

PROJECT

FIRM

TYPE


## PHOTOMETRICS

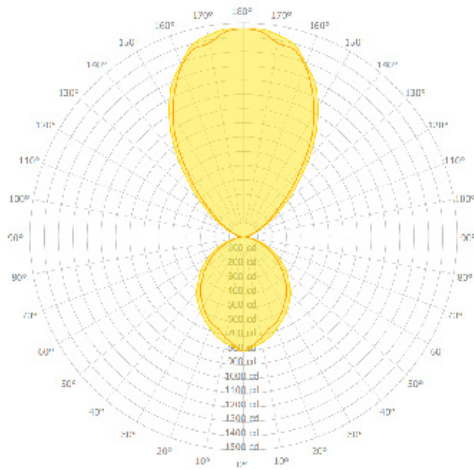

**RUSH LED UP/DN 4FT LTG1(I) LTG1(D) 3500K**  
 DELIVERED LUMENS: 4,214Lm  
 TOTAL WATTS: 42W

### ZONAL LUMEN SUMMARY


ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	560.37	8.92	13.30
0.00 - 40.00	893.98	14.23	21.21
0.00 - 60.00	1498.20	23.84	35.55
0.00 - 90.00	1790.92	28.50	42.50
90.00 - 120.00	208.33	3.32	4.94
90.00 - 150.00	1366.72	21.75	32.43
90.00 - 180.00	2423.48	38.57	57.50
0.00 - 180.00	4214.40	67.07	100.00

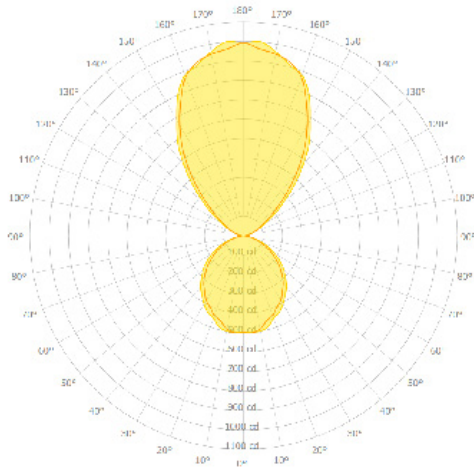

**RUSH LED UP/DN 4FT LTG2(I) LTG2(D) 3500K**  
 DELIVERED LUMENS: 2,827Lm  
 TOTAL WATTS: 28W

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	375.33	8.91	13.28
0.00 - 40.00	597.95	14.19	21.15
0.00 - 60.00	1006.23	23.89	35.59
0.00 - 90.00	1202.29	28.54	42.53
90.00 - 120.00	139.68	3.32	4.94
90.00 - 150.00	917.45	21.78	32.45
90.00 - 180.00	1624.74	38.57	57.47
0.00 - 180.00	2827.03	67.11	100.00

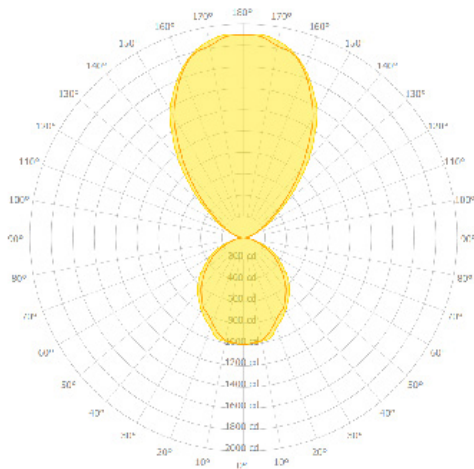

**RUSH LED UP/DN 4FT LTG3(I) LTG3(D) 3500K**  
 DELIVERED LUMENS: 5,521Lm  
 TOTAL WATTS: 58W

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	735.15	8.93	13.31
0.00 - 40.00	1170.70	14.22	21.20
0.00 - 60.00	1963.44	23.86	35.56
0.00 - 90.00	2348.49	28.53	42.53
90.00 - 120.00	271.92	3.30	4.92
90.00 - 150.00	1790.36	21.75	32.43
90.00 - 180.00	3172.93	38.55	57.47
0.00 - 180.00	5521.41	67.08	100.00