



DATE	PROJECT	FIRM	TYPE
------	---------	------	------

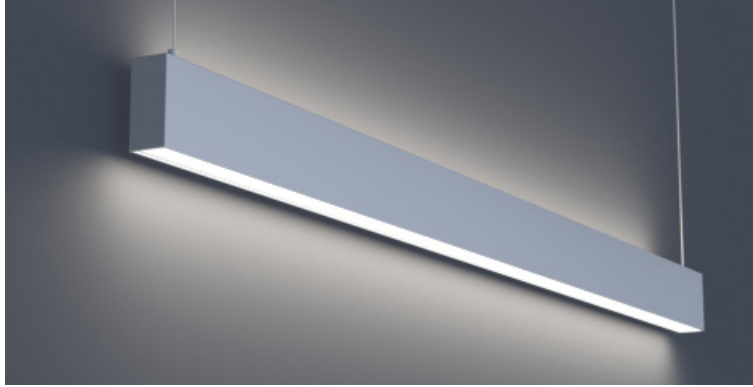


Narrow, linear luminaire with direct and indirect lighting. For use in indoor applications where an LED luminaire with very narrow profile providing continuous light is required. Suitable for suspended or wall mount installation.

FEATURES

- Available In Custom Lengths & Long Runs To 1/16" Accuracy
- Corners & Patterns Available (See Page 2)
- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K & 3500K Color Temperatures Available

APPLICATIONS	Offices, Reception Areas & Corridors		
CONSTRUCTION	Extruded Aluminum Housing With Die Cast Aluminum End Caps	OPTICS	Acrylic Diffuse Lens Direct, Opal White Film Indirect
WARRANTY	5 Year Limited Warranty (Covers Standard Components)	FINISH	Standard Powder-Coated White. Custom RAL Colors Available
FIXTURE RATINGS & CERTIFICATIONS	Union Made ETL Listed	Made In The USA Damp Location Rated	
ELECTRICAL	0-10V Remote Driver with 10% Dimming		

EXTRUSION DIMENSIONS

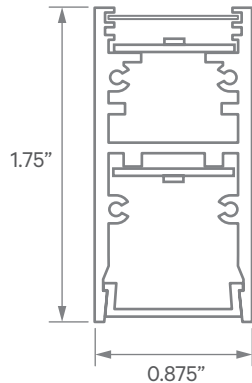

LED SYSTEM INFORMATION

	Nominal System Watts		Nominal Delivered Lumens	
	DIRECT	INDIRECT	DIRECT	INDIRECT
Standard (LTG1)	5.25 W/ft	5.25 W/ft	450 Lm/ft	600 Lm/ft
Low (LTG2)	3.5 W/ft	3.5 W/ft	300 Lm/ft	400 Lm/ft
High (LTG3)	7.25 W/ft	7.25 W/ft	600 Lm/ft	775 Lm/ft

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

ORDERING



1 - FIXTURE ID RUSH UP/DN	2 - LENGTH 4 - 4 ft 8 - 8 ft x'-x" - Custom (specify length) **Patterns available, consult factory	3 - COLOR TEMP 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K *Must use DMX Driver (Remote)	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DMX - For Color Tuning and RGBW
7 - FINISH W - White (Standard) CC - Custom Color (provide RAL#)	8 - MOUNTING AC - Air Craft Cable (50")	10 - OPTIONS SC - Separate Circuit EM 120V - Emergency Pack EM 277V - Emergency Pack			

DATE


PROJECT

FIRM


TYPE

CORNERS & PATTERNS


Available with illuminated corners, angles, and custom patterns. **Must consult factory for custom corners and patterns.**




Square Patterns



T Patterns



Custom Angles




Custom Patterns

LENS CUT OPTIONS



Straight-cut



Mitered Angle

NOTE: Straight-Cut is standard configuration, Mitered Angle is optional and must be specified.


DATE

PROJECT

FIRM

TYPE


PHOTOMETRICS

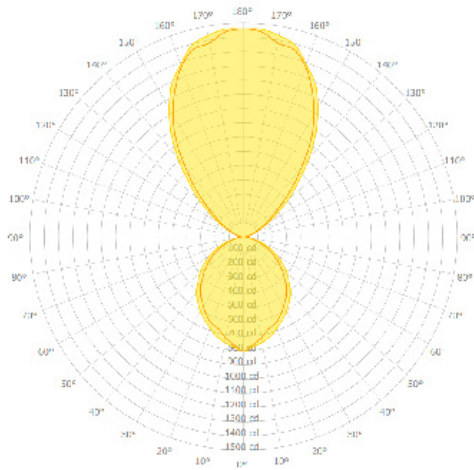

RUSH LED UP/DN 4FT LTG1(I) LTG1(D) 3500K
 DELIVERED LUMENS: 4,214Lm
 TOTAL WATTS: 42W

ZONAL LUMEN SUMMARY


ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	560.37	8.92	13.30
0.00 - 40.00	893.98	14.23	21.21
0.00 - 60.00	1498.20	23.84	35.55
0.00 - 90.00	1790.92	28.50	42.50
90.00 - 120.00	208.33	3.32	4.94
90.00 - 150.00	1366.72	21.75	32.43
90.00 - 180.00	2423.48	38.57	57.50
0.00 - 180.00	4214.40	67.07	100.00

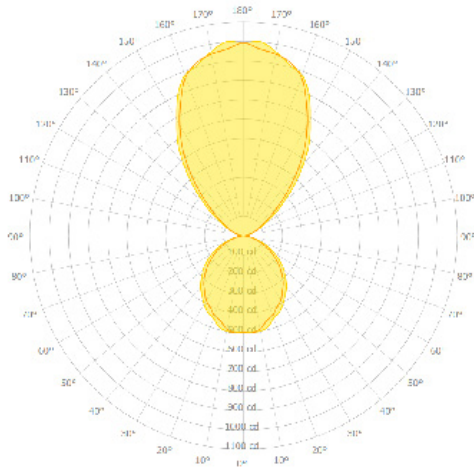

RUSH LED UP/DN 4FT LTG2(I) LTG2(D) 3500K
 DELIVERED LUMENS: 2,827Lm
 TOTAL WATTS: 28W

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	375.33	8.91	13.28
0.00 - 40.00	597.95	14.19	21.15
0.00 - 60.00	1006.23	23.89	35.59
0.00 - 90.00	1202.29	28.54	42.53
90.00 - 120.00	139.68	3.32	4.94
90.00 - 150.00	917.45	21.78	32.45
90.00 - 180.00	1624.74	38.57	57.47
0.00 - 180.00	2827.03	67.11	100.00

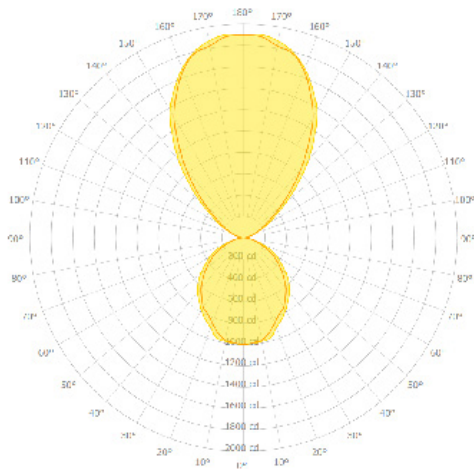

RUSH LED UP/DN 4FT LTG3(I) LTG3(D) 3500K
 DELIVERED LUMENS: 5,521Lm
 TOTAL WATTS: 58W

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	735.15	8.93	13.31
0.00 - 40.00	1170.70	14.22	21.20
0.00 - 60.00	1963.44	23.86	35.56
0.00 - 90.00	2348.49	28.53	42.53
90.00 - 120.00	271.92	3.30	4.92
90.00 - 150.00	1790.36	21.75	32.43
90.00 - 180.00	3172.93	38.55	57.47
0.00 - 180.00	5521.41	67.08	100.00