



DATE

JOB NAME

TYPE

Features	Applications
<ul style="list-style-type: none"> Fully assembled housing Clean Appearance No knock-outs on sides or ends 	<ul style="list-style-type: none"> Kitchens Office Areas Class Rooms Libraries

Series	Size	LED System	Color Temp	Voltage	Options
LP LED	2FT (22 1/2") 3FT (34 1/2") 4FT (46")	LTG1- Standard LTG2- Low LTG3- High	3000K 3500K 4000K 5000K	120 277 UNV	EM-Emergency Pack DB-Dimming Ballast AC-Aircraft Cable Kit WP-6 Ft Whip CP-8 Ft Cord and Plug SQ- Square Profile

Ordering Example: LP LED-4FT-LTG2-4000K-UNV-DB

LED System Information

Options:

NOMINAL PACKAGE	NOMINAL SYSTEM WATTS	NOMINAL DELIVERED LUMENS
LTG1 (STANDARD)	19W (per 2ft)	1550Lm (per 2ft)
LTG2 (LOW)	17W (per 2ft)	1475Lm (per 2ft)
LTG3 (HIGH)	21W (per 2ft)	1620Lm (per 2ft)

Color Temperature Pro-rate:

CCT	OUTPUT
3000K	95%
3500K	97%
4000K	100%
5000K	103%

***FOR ANY CUSTOM LED PACKAGE REQUESTS CONSULT FACTORY

Details

Application Features: Full body micro silhouette makes a bold statement with a minimal design in brushed nickel powder coated finish. Scaled to the LED modules, the matte white diffuser surrounds for soft lighting. Brushed nickel fixture can be surface mounted on wall or ceiling or pendant mounted with specially engineering cable mounting kit.

Construction: Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion. Clean body –No knock-outs on sides or ends. Knock-outs on back accept standard electrical fittings (by others) Consult factory for other locations.

Mounting: Surface mount or Pendant mount. Horizontal or Vertical.


Finish: Brushed nickel powder coated finish.

Approvals: Union made, UL listed, and manufactured in the US.

Electrical: Integral Driver

Options: Battery Pack, Dimming Ballast, Aircraft Cable Kits, Whips and Cord and Plug. Square profile, see page 2.

Optics: Matte white diffuser.

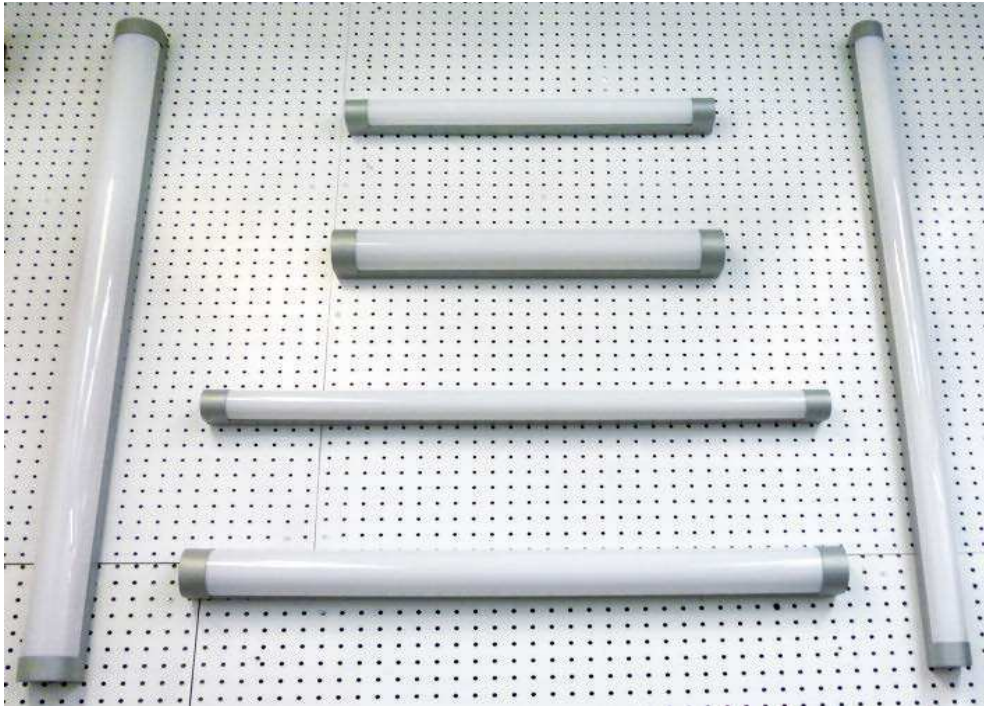

OPTIONAL SQUARE
PROFILE:

