


DATE _____ PROJECT _____ FIRM _____ TYPE _____

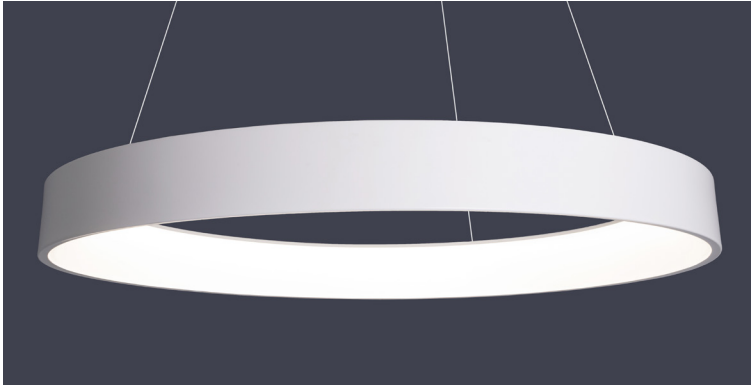

Suspended, architectural LED halo providing uplight and downlight. Great for lobbies and modern office spaces. Available suspended with cable/canopy. Custom colors available.

FEATURES

- Custom Color & Outputs Available
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Die Formed and Embossed, Heavy Gauge Rolled Steel Housing, Spun Steel Trim | **OPTICS** Custom Molded Opal Lens

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated




DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)



ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available. Driver Remote With "FC" (Flat Canopy) Option.

EXTRUSION DIMENSIONS

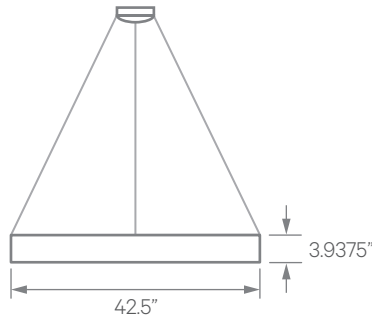

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	48 W	4,370 lm	91 LPW
Low (LTG2)	40 W	3,700 lm	93 LPW
High (LTG3)	58 W	5,130 lm	89 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING 1 2 3 4 5 6 7 8 9

1 - FIXTURE ID | **2 - LENGTH** | **3 - COLOR TEMP** | **4 - LED SYSTEM** | **5 - VOLTAGE** | **6 - DRIVER**

LOOP LED | **4 - 4 ft** | **30 - 3000K/90 CRI**
35 - 3500K/90 CRI
40 - 4000K/90 CRI
TW* - Tunable White
RGBW** - RGB + 3000K
*Must use DMX or TW10 Driver
**Must use DMX Driver

LTG1 - Standard
LTG2 - Low
LTG3 - High
LTGC - Custom Output

UNV - Universal (120/277V)

DB - Standard Dimming (0-10V)
DB% - 1% Dimming (0-10V)
PoE - Power over Ethernet. Consult Factory for Compatibility
DMX* - For Color Tuning and RGBW
TW10* - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)
*Remote Driver

7 - FINISH | **8 - MOUNTING** | **9 - OTHER OPTIONS**

W - White (Standard)
BLK* - Black
CC* - Custom Color (provide RAL#)

AC - Air Craft Cable
SM - Surface Mount

EM 120V - Emergency Pack
EM 277V - Emergency Pack
EMCKT - Emergency Circuit
FC - Flat Canopy (Remote Driver)

*White cord and canopy provided. Must specify for other requests.