



DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_




Innovative, architectural square LED luminaire providing uplight and downlight. Great for lobbies and modern office spaces. Available suspended with cable/canopy. Custom colors available.

### FEATURES

- Custom Color & Outputs Available
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

<b>APPLICATIONS</b>	Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors		
<b>CONSTRUCTION</b>	Die Formed and Embossed, Heavy Gauge Cold Rolled Steel Housing	<b>OPTICS</b>	Custom Molded Opal Lens
<b>WARRANTY</b>	5 Year Limited Warranty (Covers Standard Components)		<b>FINISH</b> Standard Powder-Coated White. Custom RAL Colors Available
<b>FIXTURE RATINGS &amp; CERTIFICATIONS</b>	Union Made ETL Listed	Made In The USA Damp Location Rated	 <b>DRIVERS &amp; SENSORS</b> 
<b>ELECTRICAL</b>	Integral Driver with 0-10V Dimming Standard		For Wiring Diagrams and Sensor Information Click <a href="#">Here</a>

### EXTRUSION DIMENSIONS

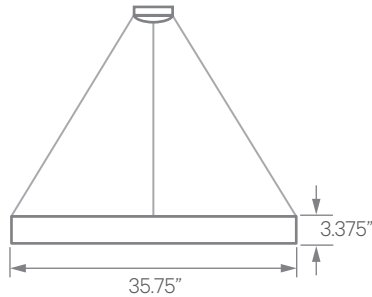

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	32 W	2,900 lm	90 LPW
Low (LTG2)	27 W	2,400 lm	91 LPW
High (LTG3)	42 W	3,750 lm	88 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

**ORDERING**  1  2  3  4  5  6  7  8  9

<b>1 - FIXTURE ID</b> QUAD LED	<b>2 - LENGTH</b> 3 - 3 ft	<b>3 - COLOR TEMP</b> 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI TW* - Tunable White RGBW** - RGB + 3000K *Must use DMX or TW10 Driver **Must use DMX Driver	<b>4 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER</b> DB - Standard Dimming (0-10V) PoE - Power over Ethernet. Consult Factory for Compatibility DMX* - For Color Tuning and RGBW TW10* - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control) *Remote Driver
<b>7 - FINISH</b> W - White (Standard) BLK* - Black CC* - Custom Color (provide RAL#)	<b>8 - MOUNTING</b> AC - Air Craft Cable	<b>9 - OTHER OPTIONS</b> EM 120V - Emergency Pack EM 277V - Emergency Pack EMCKT - Emergency Circuit			

\*White cord and canopy provided. Must specify for other requests.