

DATE	PROJECT	FIRM	TYPE
------	---------	------	------



Architectural luminaire with very low profile using specially formulated black optic that allows the unilluminated fixture to seamlessly blend in to dark environments and delivers full illumination when switched on.

FEATURES

- Black to White Optic
- 100% Direct Lighting
- Available In Made To Measure Lengths Specifiable In 4" Increments
- Patterns Available (See Page 2)
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Restaurants, Reception Areas & Corridors

CONSTRUCTION Extruded Aluminum Housing with Die Cast Ends. Formed Steel Gear Tray

OPTICS Black to White 'Ink' Optic

WARRANTY 5 Year Limited Warranty (Covers Standard Components)

FINISH Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed Made In The USA Damp Location Rated




DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)



ELECTRICAL Remote Driver with 0-10V Dimming Standard or 'Power Over Wire' System Which Eliminates Power Feed Cord By Combining The Aircraft Cable and Power Feed

EXTRUSION DIMENSIONS



NOTE: FIXTURE DEPTH IS 1-3/4" WHEN USING 'ACP' OPTION

ORDERING



1 - FIXTURE ID RUSH LED DN - INK	2 - LENGTH 4 - 4 ft 8 - 8 ft X'-X" - Specify Length (4" Increments) PAT - Pattern (Consult Factory)	3 - COLOR TEMP 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility
--	--	---	---	--	--

7 - FINISH BLK* - Black (Standard) W* - White CC* - Custom Color (provide RAL#)	8 - MOUNTING AC - Air Craft Cable (50") ACP - Power Over Aircraft Cable SM - Surface Mount	9 - OTHER OPTIONS EM 120V - Emergency Pack EM 277V - Emergency Pack EMCKT - Emergency Circuit
---	--	---

*White cord and canopy provided. Must specify for other requests.

DATE

PROJECT

FIRM


TYPE

PATTERNS


Patterns feature illuminated corners and angles. **Must consult factory for custom corners and patterns.**




Square Patterns



T Patterns




Custom Angles



Custom Patterns


LENS CUT



Mitered

ACP - 'Power Over Aircraft Cable' Option

*PLEASE NOTE: EXTRUSION IS 1-3/4" TALL WHEN USING ACP OPTION

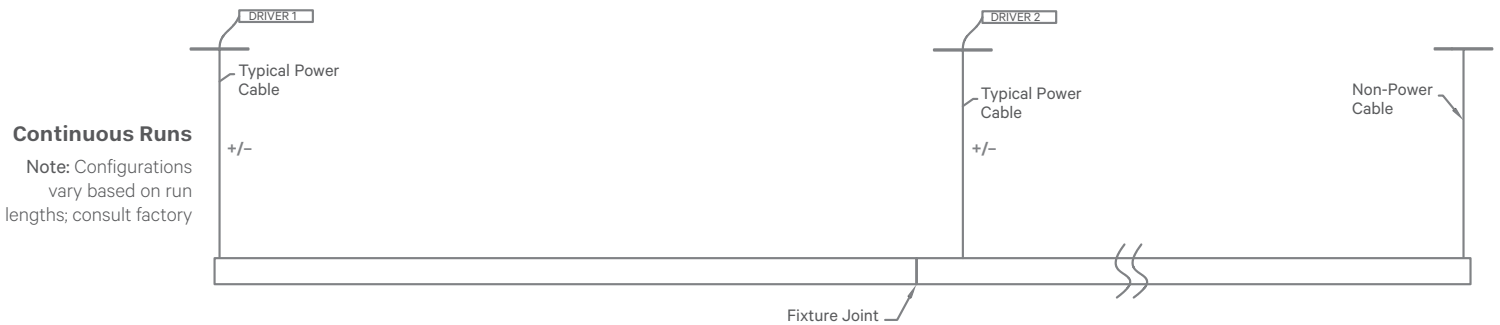

Updated: 05/15/2019