


DATE _____ PROJECT _____ FIRM _____ TYPE _____

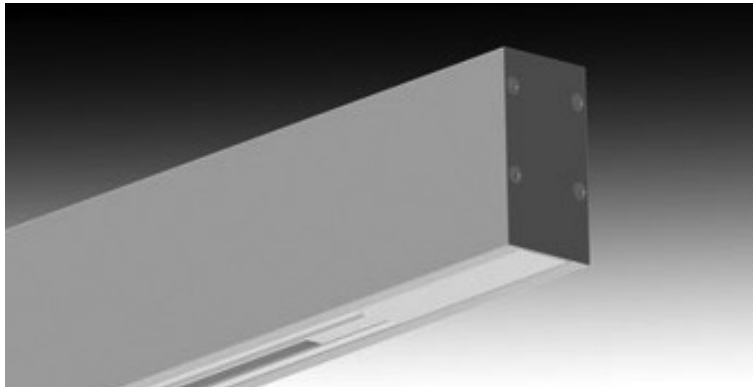

FEATURES

- Available In Made To Measure Lengths Accurate Up To 1/16"
- Patterns Available (See Page 2)
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE- [See More](#)

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas, & Corridors

FINISH Standard Powder-Coated White. Custom RAL Colors Available

CONSTRUCTION Extruded Aluminum Housing with Die Cast Ends. Formed Steel Gear Tray

OPTICS N/A




DRIVERS, SENSORS, & POE



For Wiring Diagrams, POE, and Sensor Information Click [Here](#)

ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION (For Uplight Option Only)

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	7.25 W/ft	620 lm/ft	85 LPW
Low (LTG2)	5 W/ft	440 lm/ft	88 LPW
High (LTG3)	10 W/ft	829 lm/ft	83 LPW

Based on a 90CRI, 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING



1 - FIXTURE ID

TRX LED

2 - LENGTH

- 2 - 2 ft
- 4 - 4 ft
- 8 - 8 ft
- X'-X" - Specify Length
- PAT - Pattern (Consult Factory)

3 - COMPONENT

- UP - Uplight
- NA - No Uplight (Track Only)

4 - COLOR TEMP

- 27 - 2700K/90 CRI
- 30 - 3000K/90 CRI
- 35 - 3500K/90 CRI
- 40 - 4000K/90 CRI
- 50 - 5000K/90 CRI
- WD* - Warm Dim 2200K-3000K
- TW** - Tunable White 2700K-6500K

*Requires WD10 Driver
**Requires TW10 Driver

5 - LED SYSTEM

- LTG1 - Standard
- LTG2 - Low
- LTG3 - High
- LTGC - Custom Output

6 - VOLTAGE

- UNV - Universal (120/277V)
- 347V* - 347V

*Must use DB Driver

7 - DRIVER

- DB - Standard 1% Dimming (0-10V)
- DB.1% - 0.1% Dimming (0-10V)
- ELV-TRI - 2-wire 1% Dimming (120V only) ELV and TRIAC Compatible
- LDE1 - Lutron Digital EcoSystem
- DALI - DALI-2 Driver
- PoE - Power over Ethernet. Consult Factory for Compatibility
- TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)
- WD10 - 0-10V Driver For Warm Dimming
- PSQ - Lutron 0-10V For Color Tuning

8 - FINISH

- W - White (Standard)
- BLK* - Black
- CC* - Custom Color (provide RAL#)

*White cord and canopy provided. Must specify for other requests.

9 - MOUNTING

- AC - Air Craft Cable (50")

10 - OTHER OPTIONS

- EM 120V - Emergency Pack
- EM 277V - Emergency Pack
- EMCKT - Emergency Circuit

DATE


PROJECT

FIRM


TYPE

PATTERNS


Patterns feature illuminated corners and angles. **Must consult factory for custom corners and patterns.**



Square Patterns




X Patterns



T Patterns



Custom Angles



Custom Patterns