


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_

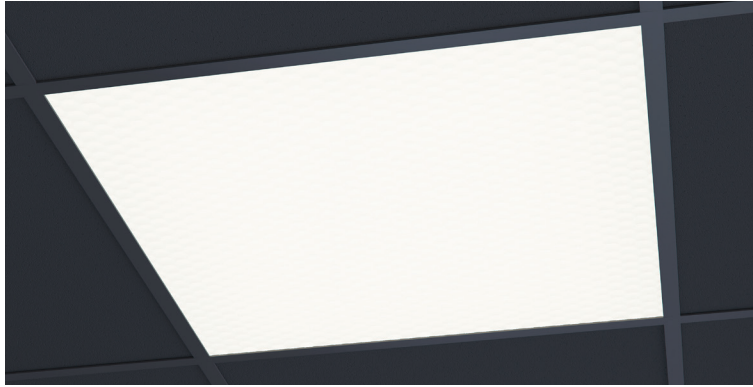

Specification grade, recessed, enclosed and gasketed troffer with clear prismatic #12 pattern acrylic lens. For use in indoor and exterior canopy applications where an LED moisture and dust resistant troffer is required.


### FEATURES

- Heavy Duty Construction
- Dust and Moisture Resistant
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

<b>APPLICATIONS</b>	Carwash, Parking Garages, Ships & Marine Vessels, Dusty Environments		
<b>CONSTRUCTION</b>	Die Formed and Spot Welded, 20 ga. Cold Rolled Steel Housing and Door Frame with Gasketing	<b>OPTICS</b>	Prismatic Acrylic Lens (Lens May Be Mounted Smooth Face Down for Better Seal to Door Frame)
<b>WARRANTY</b>	5 Year Limited Warranty (Covers Standard Components)	<b>FINISH</b>	Standard Powder-Coated White. Custom RAL Colors Available
<b>FIXTURE RATINGS &amp; CERTIFICATIONS</b>	Union Made ETL Listed	Made In The USA	Damp Location Rated IP66 Rated
<b>ELECTRICAL</b>	Integral Driver with 0-10V Dimming Standard. Several Driver Options Available		<b>DRIVERS</b>  For Wiring Diagrams <a href="#">Click Here</a>



### EXTRUSION DIMENSIONS

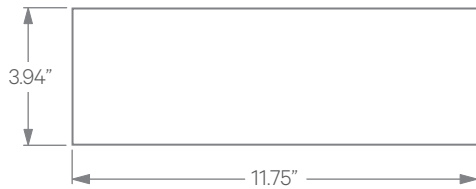

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	29 W	2,915 lm	100 LPW
Low (LTG2)	20 W	2,102 lm	102 LPW
High (LTG3)	40 W	3,900 lm	98 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING	1	2	3	4	5	6	7	8	9	10
<b>1 - FIXTURE ID</b>	<b>WET LED</b>									
<b>2 - LENGTH</b>	<b>1x4</b>									
<b>3 - COLOR TEMP</b>	<b>30</b> - 3000K/90 CRI <b>35</b> - 3500K/90 CRI <b>40</b> - 4000K/90 CRI <b>50</b> - 5000K/90 CRI <b>TW*</b> - Tunable White <b>RGBW**</b> - RGB+3000K *Must use DMX or TW10 Driver **Must use DMX Driver									
<b>4 - LED SYSTEM</b>	<b>LTG1</b> - Standard <b>LTG2</b> - Low <b>LTG3</b> - High <b>LTGC</b> - Custom Output									
<b>5 - VOLTAGE</b>	<b>UNV</b> - Universal (120/277V)									
<b>6 - DRIVER</b>	<b>DB</b> - Standard Dimming (0-10V) <b>DB1%</b> - 1% Dimming (0-10V) <b>DB.1%</b> - 0.1% Dimming (0-10V) <b>LTEA</b> - Lutron 2-wire 1% Dimming (120V only) <b>LDE1</b> - Lutron Digital EcoSystem <b>LDE5</b> - 5 Series EcoSystem; 5% Dimming <b>PoE</b> - Power over Ethernet. Consult Factory for Compatibility <b>DMX</b> - For Color Tuning and RGBW (Remote) <b>TW10</b> - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)									
<b>7 - FINISH</b>	<b>W</b> - White (Standard) <b>CC</b> - Custom Color (provide RAL#)									
<b>8 - MOUNTING</b>	<b>T</b> - 9/16" Tee Grid <b>TI5</b> - 15/16" Tee Grid <b>SG</b> - Slot Grid/Interlude <b>F</b> - Flange									
<b>9 - CIRCUIT (Optional)</b>	<b>EM 120V</b> - Emergency Pack <b>EM 277V</b> - Emergency Pack									
<b>10 - OTHER OPTIONS</b>	<b>WH6</b> - 6ft Whips Preinstalled									