


DATE _____ PROJECT _____ FIRM _____ TYPE _____

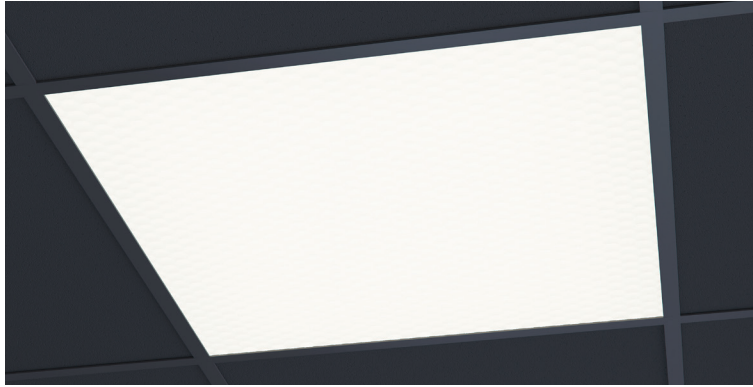

Specification grade, recessed, enclosed and gasketed troffer with clear prismatic #12 pattern acrylic lens. For use in indoor and exterior canopy applications where an LED moisture and dust resistant troffer is required.

FEATURES

- Heavy Duty Construction
- Dust and Moisture Resistant
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

APPLICATIONS	Carwash, Parking Garages, Ships & Marine Vessels, Dusty Environments		
CONSTRUCTION	Die Formed and Spot Welded, 20 ga. Cold Rolled Steel Housing and Door Frame with Gasketing	OPTICS	Prismatic Acrylic Lens (Lens May Be Mounted Smooth Face Down for Better Seal to Door Frame)
WARRANTY	5 Year Limited Warranty (Covers Standard Components)	FINISH	Standard Powder-Coated White. Custom RAL Colors Available
FIXTURE RATINGS & CERTIFICATIONS	Union Made ETL Listed	Made In The USA	Damp Location Rated IP66 Rated
ELECTRICAL	Integral Driver with 0-10V Dimming Standard. Several Driver Options Available		DRIVERS For Wiring Diagrams Click Here



EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	58 W	5,800 lm	100 LPW
Low (LTG2)	42 W	4,284 lm	102 LPW
High (LTG3)	83 W	8,134 lm	98 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING	1	2	3	4	5	6	7	8	9	10
-----------------	---	---	---	---	---	---	---	---	---	----

1 - FIXTURE ID WET LED	2 - LENGTH 2x4	3 - COLOR TEMP 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW** - RGB+3000K *Must use DMX or TW10 Driver **Must use DMX Driver	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)
7 - FINISH W - White (Standard) CC - Custom Color (provide RAL#)	8 - MOUNTING T - 9/16" Tee Grid TI5 - 15/16" Tee Grid SG - Slot Grid/Interlude F - Flange	9 - CIRCUIT (Optional) EM 120V - Emergency Pack EM 277V - Emergency Pack	10 - OTHER OPTIONS WH6 - 6ft Whips Preinstalled		