


DATE _____ PROJECT _____ FIRM _____ TYPE _____

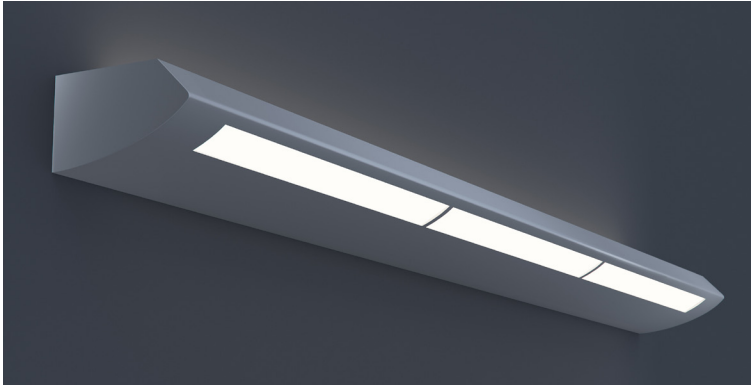

Specification grade, wall-mounted, high performance architectural luminaire. For use in indoor applications where an LED direct/indirect luminaire with maximum uplight as well as glare-free downlight is required.

FEATURES

- 12% Direct and 88% Indirect Light Distribution
- Continuous Row Mounting
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors


CONSTRUCTION Durable Cold Rolled 20 ga. Steel Body. 95% Enhanced Anodized Aluminum Reflector and Housing | **OPTICS** Acrylic Overlay Slots

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated |   | **DRIVERS & SENSORS** 

ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available | For Wiring Diagrams and Sensor Information Click [Here](#)

EXTRUSION DIMENSIONS

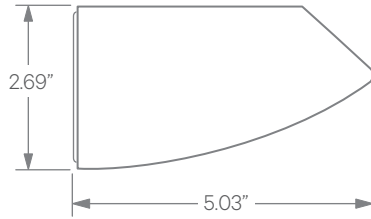

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	7.25 W/ft	635 lm/ft	87 LPW
Low (LTG2)	5 W/ft	420 lm/ft	84 LPW
High (LTG3)	10 W/ft	815 lm/ft	81 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING 1 2 3 4 5 6 7 8 9 10

1 - FIXTURE ID
1050WM LED

2 - LENGTH
4 - 4 ft
8 - 8 ft
X' - Specify Length for Continuous Row Mounting (Increments of 4 ft)

3 - COLOR TEMP
30 - 3000K/90 CRI
35 - 3500K/90 CRI
40 - 4000K/90 CRI
50 - 5000K/90 CRI

4 - LED SYSTEM
LTG1 - Standard
LTG2 - Low
LTG3 - High
LTGC - Custom Output

5 - VOLTAGE
UNV - Universal (120/277V)

6 - DRIVER
DB - Standard Dimming (0-10V)
DB1% - 1% Dimming (0-10V)
DB.1% - 0.1% Dimming (0-10V)
LTEA - Lutron 2-wire 1% Dimming (120V only)
LDE1 - Lutron Digital EcoSystem
LDE5 - 5 Series EcoSystem; 5% Dimming
PoE - Power over Ethernet. Consult Factory for Compatibility

7 - FINISH
W - White (Standard)
BLK - Black
CC - Custom Color (provide RAL#)

8 - MOUNTING
WM - Wall Mount

9 - CONTROL (Optional)
EIS - Enlighted Sensor
WISD - Wattstopper Daylight Sensor
WISM - Wattstopper Occupancy Sensor
SLS - SensiLUM Sensor
ACS - Acuity Controls nLight System
CCS - Casambi Compatible
ECS - Eaton WaveLinx System

10 - OTHER OPTIONS
EM 120V - Emergency Pack
EM 277V - Emergency Pack
EMCKT - Emergency Circuit

*For other control systems not listed consult factory.

DATE

PROJECT


FIRM

TYPE

DIMENSIONS

4' MODEL

TOP VIEW



8' MODEL

TOP VIEW

