

DATE

JOB NAME

TYPE

Features	Applications
<ul style="list-style-type: none"> <li>White cross baffle / reflector optic system was designed specifically for retail aisle lighting</li> <li>Replaces 250 or 400 watt ceiling heights 10' &amp; higher</li> <li>HID alternative or replacement</li> </ul>	<ul style="list-style-type: none"> <li>Retail Stores</li> <li>Gymnasiums</li> <li>High Bay Lighting</li> <li>Manufacturing Areas</li> <li>Large Storage Rooms</li> </ul>

Series	Size	Lamps	Watts	Voltage	Options
FBL	4FT 8FT	2 3 4 6 8	32WT8 28WT5 54WT5HO	120V 277V UNV	EM-EM Pack 1 Lamp DB-Dimmer MS-Motion Sensor UP-Uplite

Ordering Example: FBL-8FT-4-54WT5HO-UNV-EM

**Details**

**Application Features:** Mid-level, specification grade fluorescent fixture. Lighting distribution and energy efficiency makes this luminaire ideal as an HID substitute, especially in Retail Store Applications. Fluorescent lamps offer instant warm up and restrike. For use in indoor applications where high efficiency, high performance and ease of installation are required. Suitable for surface or suspended mounting individually or in continuous rows and high ceiling applications.

**Construction:** Die and brake formed, 20 ga. cold rolled steel housing assembly.

**Finish:** Powder painted white housing. High reflectivity coated, reflecting surfaces for improved efficiency.

**Electrical:** All electrical components are UL approved. Electronic ballasts are standard 120V, 60Hz. or as specified, including Multi-Voltage, 50/60Hz. Access plates are included to facilitate wiring to external power supply. Sufficient knockouts are provided for connections and through wiring.

**Approvals:** Union made, UL listed, and manufactured in the US.

**Options:** Polycarb rotary lock lamp holders. Dual circuitry wiring. Dimming ballasts.

**Optional Adders:** EM packs. Motion sensor controllers (infrared or ultrasonic). Stem and canopy sets.

**Optics:** Standard reflectors are made of specular anodized aluminum with a reflectivity of 95%. White cross blade baffles.


**Mounting:** Knock out is provided for single stem mounting (3/4" rigid pipe). Optional stem and canopy sets are available in multiples of six inches. Optional dual hooks and mounting channel assembly, to be used wherever uniform fixture alignment within rows is critical. Ideal for new installations. Provision for chain mounting included.

**HI-BAY HANGERS AVAILABLE**


DISCLAIMER: CORONET INC RESERVES THE RIGHT TO MAKE ANY DESIGN CHANGES FOR CONTINUOUS IMPROVEMENT WHICH WILL NOT AFFECT THE OVERALL APPEARANCE OR PERFORMANCE. ALL CEILINGS ARE TO BE ADEQUATELY REINFORCED BY OTHERS BEFORE INSTALLATION. ALL FIXTURES ARE TO BE WIRED BY A CERTIFIED ELECTRICIAN ONLY. THIS INFORMATION IS PROPERTY OF CORONET INC., AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT ANY WRITTEN CONSENT OF CORONET INC.

END VIEW


2 LAMP

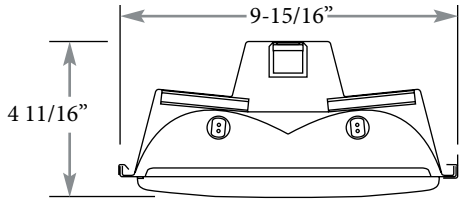

3 LAMP

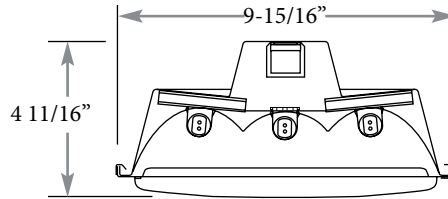

4 LAMP

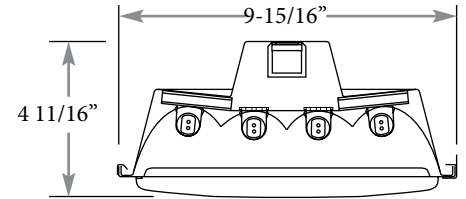

BACK VIEW

