


DATE _____ PROJECT _____ FIRM _____ TYPE _____

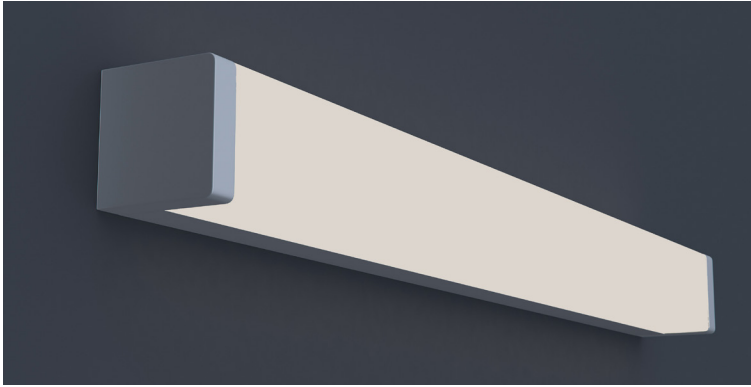

Specification grade surface mounted wall or ceiling luminaire with frosted white lens. For use in indoor applications where an LED luminaire with motion sensor and separate circuit options for energy savings is required.

FEATURES

- Continuous Row Mounting
- Frosted White Lens
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

APPLICATIONS Stairwells, Corridors, Bathrooms, Utility Rooms

CONSTRUCTION Die Formed 20 Gauge Steel Housing | **OPTICS** Frosted White Lens with No LED Imaging

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated




DRIVERS

For Wiring Diagrams [Click Here](#)



ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	7.25 W/ft	675 lm/ft	93 LPW
Low (LTG2)	5 W/ft	480 lm/ft	95 LPW
High (LTG3)	10W/ft	940lm/ft	94 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING

1 - FIXTURE ID	2 - LENGTH	3 - COLOR TEMP	4 - LED SYSTEM	5 - VOLTAGE	6 - DRIVER
HP LED	2 - 2 ft 3 - 3 ft 4 - 4 ft	30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW** - RGB+3000K <small>*Must use DMX or TW10 Driver **Must use DMX Driver</small>	LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	UNV - Universal (120/277V)	DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

7 - FINISH	8 - MOUNTING	9 - OTHER OPTIONS
W - White (Standard) CC - Custom Color (provide RAL#)	SM - Surface Mount WM - Wall Mount PS - Pendant Stem (12", 18", 24", 36", 48")	EM 120V - Emergency Pack EM 277V - Emergency Pack EMCKT - Emergency Circuit RS - Rocker Switch (On/Off) MS - On/Off Motion Sensor MS/DIM - Dim Down Motion Sensor