


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_

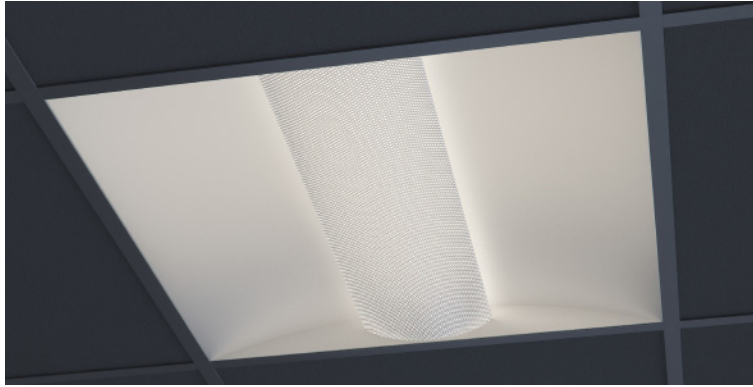

Shallow, recessed luminaire with perforated acrylic center basket. Durable steel housing. Suitable for grid and sheetrock ceilings.

### FEATURES

- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

**APPLICATIONS** Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

**CONSTRUCTION** Heavy Gauge, Cold Rolled Steel Housing | **OPTICS** Perforated Acrylic Center-Basket

**WARRANTY** 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

**FIXTURE RATINGS & CERTIFICATIONS** Union Made ETL Listed | Made In The USA Damp Location Rated




### DRIVERS & SENSORS



For Wiring Diagrams and Sensor Information Click [Here](#)

**ELECTRICAL** Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

### EXTRUSION DIMENSIONS

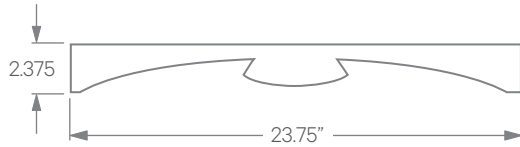

NOTE: Dimensions reflect fixture housing only. Please allow additional 1.25" for driver on back of fixture.

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	29 W	2,350 lm	80 LPW
Low (LTG2)	20 W	1,650 lm	82 LPW
High (LTG3)	40 W	3,120 lm	78 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

### ORDERING



<p><b>1 - FIXTURE ID</b></p> <p>TSSW LED</p>	<p><b>2 - LENGTH</b></p> <p>2x2</p>	<p><b>3 - COLOR TEMP</b></p> <p>27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW** - RGB + 3000K</p> <p>*Must use DMX or TW10 Driver **Must use DMX Driver</p>	<p><b>4 - LED SYSTEM</b></p> <p>LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output</p>	<p><b>5 - VOLTAGE</b></p> <p>UNV - Universal (120/277V)</p>	<p><b>6 - DRIVER</b></p> <p>DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)</p>	<p><b>7 - FINISH</b></p> <p>W - White (Standard) CC - Custom Color (provide RAL#)</p>	<p><b>8 - MOUNTING</b></p> <p>T - 9/16" Tee Grid TI5 - 15/16" Tee Grid SG - Slot Grid/Interlude F - Flange</p>	<p><b>9 - CIRCUIT (Optional)</b></p> <p>EM 120V - Emergency Pack EM 277V - Emergency Pack</p>	<p><b>10 - OTHER OPTIONS</b></p> <p>WH6 - 6ft Whips Preinstalled AR - Air Return</p>
--	-------------------------------------	--	---	---	--	---	--	---	--