


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_

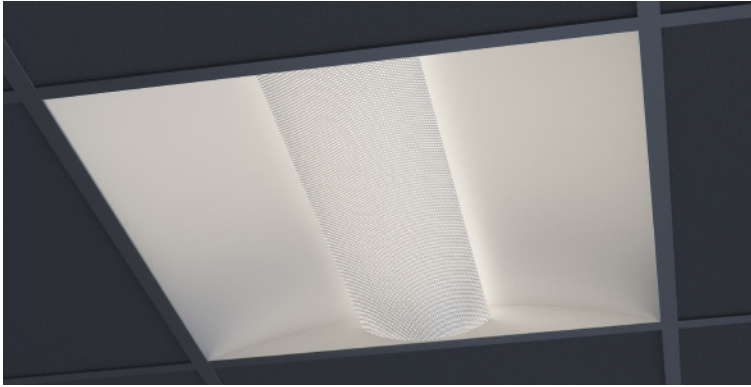

### FEATURES

- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE- [See More](#)

**APPLICATIONS** Offices, Lobbies, Retail Stores, Classrooms, Reception Areas, & Corridors

**FINISH** Standard Powder-Coated White. Custom RAL Colors Available

**CONSTRUCTION** Heavy Gauge, Cold Rolled Steel Housing

**OPTICS** Perforated Acrylic Center-Basket




### DRIVERS, SENSORS, & POE



For Wiring Diagrams, POE, and Sensor Information Click [Here](#)

**ELECTRICAL** Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

### EXTRUSION DIMENSIONS

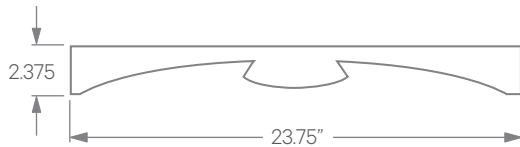

NOTE: Dimensions reflect fixture housing only. Please allow additional 1.25" for driver on back of fixture.

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	29 W	2,350 lm	81 LPW
Low (LTG2)	20 W	1,669 lm	83 LPW
High (LTG3)	40 W	3,144 lm	78 LPW

Based on a 90CRI, 3500K luminaire using one driver. Custom outputs available; specify below.

### ORDERING



#### 1 - FIXTURE ID

TSSW LED

#### 2 - LENGTH

2x2

#### 3 - COLOR TEMP

- 27 - 2700K/90 CRI
  - 30 - 3000K/90 CRI
  - 35 - 3500K/90 CRI
  - 40 - 4000K/90 CRI
  - 50 - 5000K/90 CRI
  - WD\* - Warm Dim  
2200K-3000K
  - TW\*\* - Tunable White  
2700K-6500K
  - RGBW30\*\*\* - RGB + 3000K
  - RGBW35\*\*\* - RGB + 3500K
- \*Requires WD10 Driver  
\*\*Requires DMX or TW10 Driver  
\*\*\*Requires DMX Driver

#### 4 - LED SYSTEM

- LTG1 - Standard
- LTG2 - Low
- LTG3 - High
- LTGC - Custom Output

#### 5 - VOLTAGE

- UNV - Universal  
(120/277V)
  - 347V\* - 347V
- \*Must use DB Driver

#### 6 - DRIVER

- DB - Standard 1% Dimming (0-10V)
- DB.1% - 0.1% Dimming (0-10V)
- ELV-TRI - 2-wire 1% Dimming (120V only)  
ELV and TRIAC Compatible
- LDE1 - Lutron Digital EcoSystem
- DALI - DALI-2 Driver
- PoE - Power over Ethernet. Consult  
Factory for Compatibility
- DMX - For Color Tuning and RGBW  
(Remote)
- TW10 - Dual Channel, 0-10V For Color  
Tuning (CCT and Intensity Control)
- WD10 - 0-10V Driver For Warm Dimming
- PSQ - Lutron 0-10V For Color Tuning

#### 7 - FINISH

- W - White (Standard)
- CC - Custom Color  
(provide RAL#)

#### 8 - MOUNTING

- T - 9/16" Tee Grid
- T15 - 15/16" Tee Grid
- SG - Slot Grid/Interlude
- F - Flange

#### 9 - CIRCUIT (Optional)

- EM 120V - Emergency Pack
- EM 277V - Emergency Pack
- EMCKT - Emergency Circuit

#### 10 - OTHER OPTIONS

- WH6 - 6ft Whips  
Preinstalled
- AR - Air Return