

DATE	PROJECT	FIRM	TYPE
------	---------	------	------



Shallow, recessed luminaire with perforated metal center basket. Durable steel housing. Suitable for grid and sheetrock ceilings.

### FEATURES

- Custom Outputs Available
- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available

**APPLICATIONS** Offices, Lobbies, Retail Stores, Reception Areas & Corridors

**CONSTRUCTION** Heavy Gauge Cold Rolled Steel Housing | **OPTICS** Perforated Metal Centerbasket and Acrylic Overlay

**WARRANTY** 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White


**FIXTURE RATINGS & CERTIFICATIONS** Union Made ETL Listed | Made In The USA Damp Location Rated



**ELECTRICAL** Driver is 0-10V 10% Dimming Standard. Several Driver Options Available. See Below For Lutron Dimming Information

2-Wire Forward Phase; Hi-Lume 1% Dimming, Only Available For 120V .....	LTEA
3-Wire EcoSystem; Hi-Lume 1% Dimming .....	L3DA
Digital EcoSystem; Hi-Lume 1% Dimming, 'Soft-on Fade-to-black' (Required for Daylighting) .....	LDE1
5 Series EcoSystem; 5% Dimming .....	LDE5

### EXTRUSION DIMENSIONS

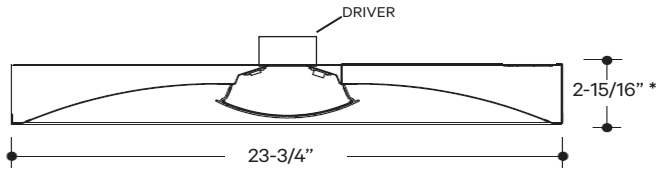

\*Please allow additional 1.25" for driver on back of fixture.

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	61 W	4,800 Lm/ft	80 Lm/W
Low (LTG2)	42 W	3,444 Lm/ft	82 Lm/W
High (LTG3)	73 W	5,694 Lm/ft	78 Lm/W

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

### ORDERING

<b>1 - FIXTURE ID</b> TSSW LED	<b>2 - LENGTH</b> 2 X 4	<b>3 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm)	<b>4 - COLOR TEMP</b> 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K <small>*Must use DMX Driver (Remote)</small>	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER</b> DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA* - Lutron 2-wire 1% Dimming L3DA* - Lutron 3-wire 1% Dimming LDE1* - Lutron Digital EcoSystem LDE5* - 5 Series EcoSystem; 5% Dimming DMX - For Color Tuning and RGBW <small>*Refer to 'Electrical' Information Above</small>
<b>7 - FINISH</b> W - White (Standard)	<b>8 - MOUNTING</b> T - 9/16" Tee Grid T15 - 15/16" Tee Grid F - Flange SG - Slot Grid/Interlude	<b>9 - OPTIONS</b> WH - 6 ft Whip, Preinstalled AR - Air Return EM 120V - Emergency Pack EM 277V - Emergency Pack			