





DATE _____ PROJECT _____ FIRM _____ TYPE _____

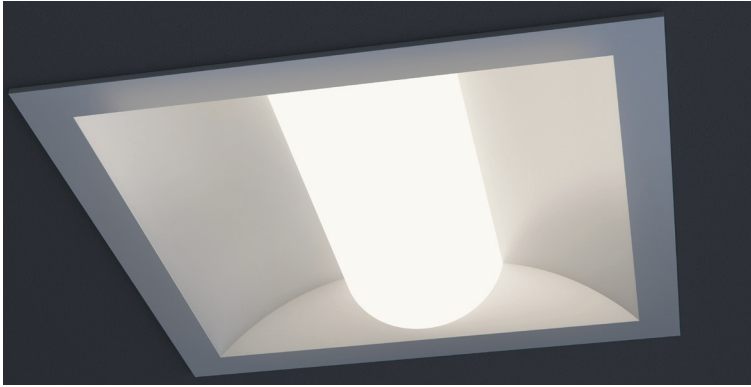


Premium grade, recessed, maximum efficiency/high performance direct/indirect architectural luminaire with dual, frosted extruded acrylic diffusers. For use in indoor applications where an LED luminaire with soft, low-glare illumination and modern styling is required.

FEATURES

- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 3500K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS	Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors		
CONSTRUCTION	Heavy Gauge, Cold Rolled Steel Housing	OPTICS	Arched High Reflective White Reflector and Dual, Frosted Extruded Acrylic Diffusers
WARRANTY	5 Year Limited Warranty (Covers Standard Components)	FINISH	Standard Powder-Coated White. Custom RAL Colors Available
FIXTURE RATINGS & CERTIFICATIONS	Union Made ETL Listed	Made In The USA Damp Location Rated	 
ELECTRICAL	Integral Driver with 0-10V Dimming Standard. Several Driver Options Available		DRIVERS For Wiring Diagrams Click Here 

EXTRUSION DIMENSIONS

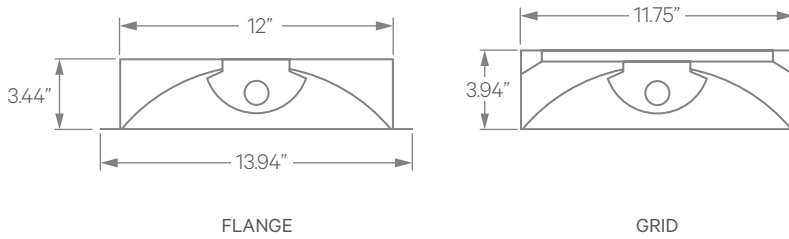

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	16 W	1,600 lm

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING									
1	2	3	4	5	6	7	8	9	10
1 - FIXTURE ID	2 - LENGTH	3 - COLOR TEMP	4 - LED SYSTEM	5 - VOLTAGE	6 - DRIVER				
TDMX LED	1x1	35 - 3500K/90 CRI 40 - 4000K/90 CRI TW* - Tunable White RGBW** - RGB+3000K <small>*Must use DMX or TW10 Driver</small> <small>**Must use DMX Driver</small>	LTG1 - Standard	UNV - Universal (120/277V)	DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)				
7 - FINISH	8 - MOUNTING	9 - CIRCUIT (Optional)	10 - OTHER OPTIONS						
W - White (Standard) CC - Custom Color (provide RAL#)	T - 9/16" Tee Grid TI5 - 15/16" Tee Grid F - Flange	EM 120V - Emergency Pack EM 277V - Emergency Pack	WH6 - 6ft Whips Preinstalled						