

DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_



Specification grade, surface mounted vapor proof luminaire. For use in exterior applications where an LED enclosed and gasketed fixture with clear acrylic impact resistant lens is required.


### FEATURES

- Vandal-Proof Luminaire for Surface, Wall, or Ceiling Mounting
- Polycarbonate, High Impact Lens
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K, 4000K & 5000K Color Temperatures Available

<b>APPLICATIONS</b>	Public Areas, Food Processing, Refrigerated Storage, Parking Structures, Car Washes, Construction Sites		
<b>CONSTRUCTION</b>	One Piece Fiberglass Housing with Polycarbonate Latches and Stainless Steel Hardware.	<b>OPTICS</b>	Specular Reflector with 92% Reflectivity, Clear Acrylic High Impact Lens, Diffuser with Linear Prisms on Sides and Frosted Ends
<b>WARRANTY</b>	5 Year Limited Warranty (Covers Standard Components)	<b>FINISH</b>	N/A
<b>FIXTURE RATINGS &amp; CERTIFICATIONS</b>	Union Made ETL Listed	Made In The USA	Damp Location Rated IP66 Rated
<b>ELECTRICAL</b>	Integral Driver with 0-10V Dimming Standard. Several Driver Options Available		<b>DRIVERS &amp; SENSORS</b>  For Wiring Diagrams and Sensor Information Click <a href="#">Here</a>



### EXTRUSION DIMENSIONS

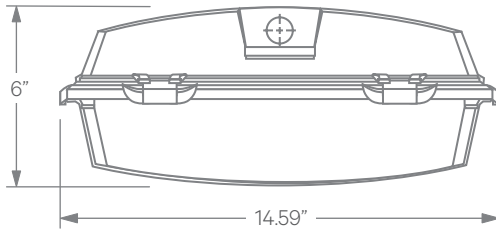

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	135 W	14,940 lm
Low (LTG2)	120 W	12,285 lm
High (LTG3)	235 W	21,130 lm

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

### ORDERING



<b>1 - FIXTURE ID</b> VDP LED	<b>2 - LENGTH</b> 4 - 4 ft	<b>3 - COLOR TEMP</b> 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW** - RGB + 3000K <small>*Must use DMX or TW10 Driver **Must use DMX Driver</small>	<b>4 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER</b> DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)
----------------------------------	-------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------	--------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### 7 - OTHER OPTIONS

- EM 120V - Emergency Pack
- EM 277V - Emergency Pack
- EMCKT - Emergency Circuit
- MS - Motion Sensor