

DATE _____ PROJECT _____ FIRM _____ TYPE _____



Specification grade, surface mounted vapor proof luminaire. For use in exterior applications where an LED enclosed and gasketed fixture with clear acrylic impact resistant lens is required.


FEATURES

- Vandal-Proof Luminaire for Surface, Wall, or Ceiling Mounting
- Polycarbonate, High Impact Lens
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K, 4000K & 5000K Color Temperatures Available

APPLICATIONS	Public Areas, Food Processing, Refrigerated Storage, Parking Structures, Car Washes, Construction Sites		
CONSTRUCTION	One Piece Fiberglass Housing with Polycarbonate Latches and Stainless Steel Hardware.	OPTICS	Specular Reflector with 92% Reflectivity, Clear Acrylic High Impact Lens, Diffuser with Linear Prisms on Sides and Frosted Ends
WARRANTY	5 Year Limited Warranty (Covers Standard Components)	FINISH	N/A
FIXTURE RATINGS & CERTIFICATIONS	Union Made ETL Listed	Made In The USA	Damp Location Rated IP66 Rated
ELECTRICAL	Integral Driver with 0-10V Dimming Standard. Several Driver Options Available		DRIVERS & SENSORS For Wiring Diagrams and Sensor Information Click Here



EXTRUSION DIMENSIONS

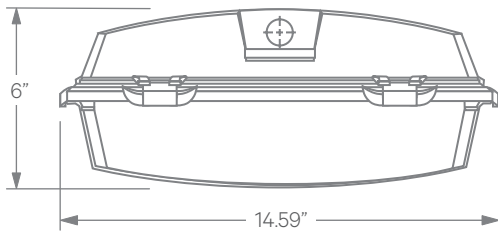

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	135 W	14,940 lm
Low (LTG2)	120 W	12,285 lm
High (LTG3)	235 W	21,130 lm

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING



1 - FIXTURE ID VDP LED	2 - LENGTH 4 - 4 ft	3 - COLOR TEMP 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW** - RGB+3000K <small>*Must use DMX or TW10 Driver **Must use DMX Driver</small>	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)
7 - CIRCUIT (Optional) EM 120V - Emergency Pack EM 277V - Emergency Pack	8 - OTHER OPTIONS MS - Motion Sensor				