

DATE _____

JOB NAME _____

TYPE _____

Features **Applications**

- Single perforated metal lamp shield
- Translucent opal white acrylic overlay
- Clean appearance
- no exposed fasteners

- Office Areas
- Retail Stores
- Class Rooms
- Corridors

Series	Size	LED System	Color Temp	Voltage	Mounting	Options
BPCW LED	2x2	LTG1- Standard LTG2- Low LTG3- High C- Custom Package (Consult Factory)	3000K 3500K 4000K 5000K	120 277 UNV	SM- Surface Mount PS- Pendant Stem	EM- EM Pack DB- Dimming LDB3- Lutron Dimming Driver (1% 3-wire control) LDBD- Lutron Dimming Driver (1% Digital EcoSystem) SC- Separate Circuit WH- Whips

Ordering Example: BPCW LED-2X2-LTG2-4000K-UNV-SM-DB

LED System Information

Options:

NOMINAL PACKAGE	NOMINAL SYSTEM WATTS	NOMINAL DELIVERED LUMENS
LTG1 (STANDARD)	29.5W	2515Lm
LTG2 (LOW)	27W	2275Lm
LTG3 (HIGH)	33W	2730Lm

Color Temperature Pro-rate:

CCT	OUTPUT
3000K	95%
3500K	97%
4000K	100%
5000K	103%

***FOR ANY CUSTOM LED PACKAGE REQUESTS CONSULT FACTORY

Details

Application Features: Premium grade, surface mounted, high performance direct/indirect architectural luminaire with single perforated metal lamp shield. For use in indoor applications where a LED luminaire with soft, low-glare illumination and modern styling is required.

Construction: Die formed and spot welded, heavy guage cold rolled steel housing. Diffuser held within hinged door frame, hinges from either side using steel pin hinges and is held in closed position by two positive cam latches. Ballast accessed through tool-less ballast cover. Sufficient knock-outs provided for optional pendant stems.


Electrical: Integral driver.

Approvals: Union made, ETL listed, and manufactured in the US.

Mounting: Surface mounts over electrical junction box or with optional pendant stems.

Optics: Contoured reflector and perforated shield with opal white acrylic overlay.

Options: Emergency Battery Backup, Dimming, and 6' Whips.

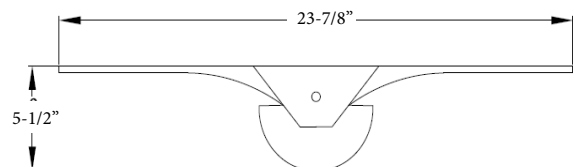

DISCLAIMER: CORONET INC RESERVES THE RIGHT TO MAKE ANY DESIGN CHANGES FOR CONTINUOUS IMPROVEMENT WHICH WILL NOT AFFECT THE OVERALL APPEARANCE OR PERFORMANCE. ALL CEILINGS ARE TO BE ADEQUATELY REINFORCED BY OTHERS BEFORE INSTALLATION. ALL FIXTURES ARE TO BE WIRED BY A CERTIFIED ELECTRICIAN ONLY. THIS INFORMATION IS PROPERTY OF CORONET INC., AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT ANY WRITTEN CONSENT OF CORONET INC.