

DATE _____ PROJECT _____ FIRM _____ TYPE _____



Specification grade, surface mounted luminaire with drum style opal white acrylic diffuser. For use in indoor applications where a compact LED luminaire with soft, low-glare illumination is required.

FEATURES

- Dome Style Diffuser Optionally Available
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS Schools, Retail Stores, Office Areas, Corridors, Bathrooms, Utility Areas

CONSTRUCTION Regressed Metal Housing Provides a Floating Appearance | **OPTICS** Drum Style Opal White Acrylic Diffuser. Dome Style Available

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated




DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)



ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

EXTRUSION DIMENSIONS

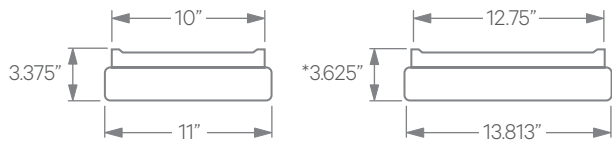

*Additional 0.25" added to height with Dome Lens option.

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
11" Fixture	17 W	1,278 lm
14" Fixture	22 W	1,704 lm

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING



1 - FIXTURE ID

CRPL LED

2 - LENGTH

11 - 11 inches
14 - 14 inches

3 - COLOR TEMP

30 - 3000K/90 CRI
40 - 4000K/90 CRI
TW* - Tunable White
RGBW** - RGB+3000K
*Must use DMX or TW10 Driver
**Must use DMX Driver

4 - VOLTAGE

UNV - Universal (120/277V)

5 - DRIVER

DB - Standard Dimming (0-10V)
DB1% - 1% Dimming (0-10V)
DB1% - 0.1% Dimming (0-10V)
LTEA - Lutron 2-wire 1% Dimming (120V only)
LDE1 - Lutron Digital EcoSystem
LDE5 - 5 Series EcoSystem; 5% Dimming
PoE - Power over Ethernet. Consult Factory for Compatibility
DMX - For Color Tuning and RGBW (Remote)
TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

6 - FINISH

W - White (Standard)
CC - Custom Color (provide RAL#)

7 - MOUNTING

SM - Surface Mount

8 - OTHER OPTIONS

EM 120V - Emergency Pack (Remote)
EM 277V - Emergency Pack (Remote)
EMCKT - Emergency Circuit
WH6 - 6ft Whips Preinstalled
DO - Dome Style Lens