


DATE _____ PROJECT _____ FIRM _____ TYPE _____

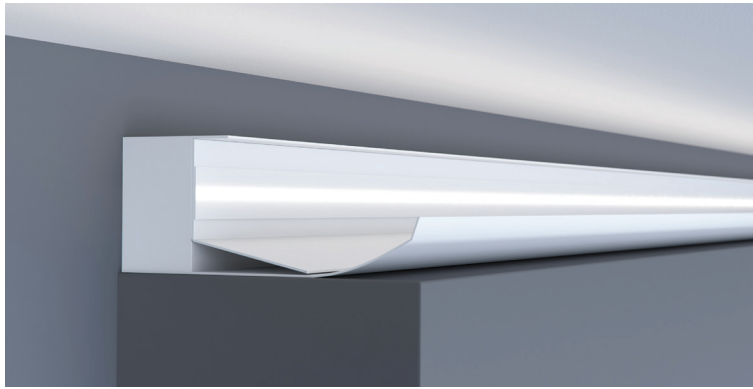

Specification grade cove lighting fixture designed to sit in the cove. For use in indoor applications where an LED cove light is required.

FEATURES

- Available In Made To Measure Lengths Accurate Up To 1/16"
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors


CONSTRUCTION Durable Cold Rolled 20 Gauge Steel. Aluminum Specular Silver Reflector | **OPTICS** White Optics Reflector

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated |   | **DRIVERS & SENSORS** 

ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available | For Wiring Diagrams and Sensor Information Click [Here](#)

EXTRUSION DIMENSIONS

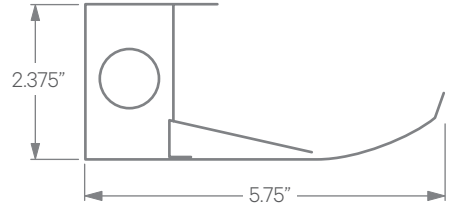

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	7.25 W/ft	800 lm/ft
Low (LTG2)	5 W/ft	550 lm/ft
High (LTG3)	10 W/ft	1100 lm/ft

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING

1 2 3 4 5 6 7

- 1 - FIXTURE ID**
CV1S LED
- 2 - LENGTH**
2 - 2 ft
4 - 4 ft
8 - 8 ft
- 3 - COLOR TEMP**
27 - 2700K/90 CRI
30 - 3000K/90 CRI
35 - 3500K/90 CRI
40 - 4000K/90 CRI
50 - 5000K/90 CRI
TW* - Tunable White
RGBW** - RGB + 3000K
*Must use DMX or TW10 Driver
**Must use DMX Driver
- 4 - LED SYSTEM**
LTG1 - Standard
LTG2 - Low
LTG3 - High
LTGC - Custom Output
- 5 - VOLTAGE**
UNV - Universal (120/277V)
- 6 - DRIVER**
DB - Standard Dimming (0-10V)
DB1% - 1% Dimming (0-10V)
DB.1% - 0.1% Dimming (0-10V)
LTEA - Lutron 2-wire 1% Dimming (120V only)
LDE1 - Lutron Digital EcoSystem
LDE5 - 5 Series EcoSystem; 5% Dimming
PoE - Power over Ethernet. Consult Factory for Compatibility
DMX - For Color Tuning and RGBW (Remote)
TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

7 - CIRCUIT (Optional)
EM 120V - Emergency Pack
EM 277V - Emergency Pack