


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_

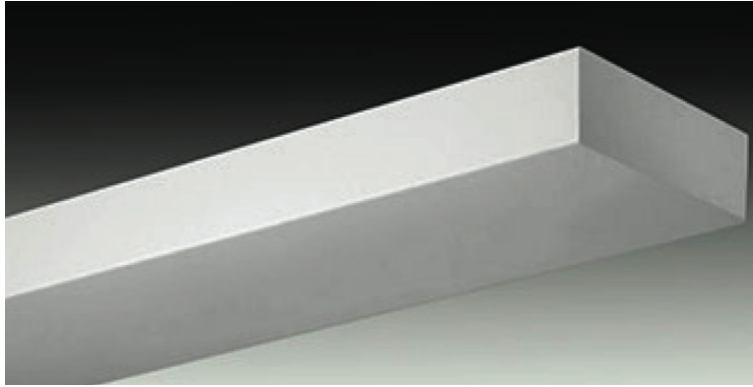

Specification grade, high performance architectural luminaire. For use in indoor applications where an LED luminaire with minimum profile and 100% uplight is required. Available as individual fixtures or with end and intermediate units for mounting in continuous rows.

### FEATURES

- 100% Indirect Light Distribution
- Continuous Row Mounting
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

**APPLICATIONS** Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

**CONSTRUCTION** Durable Cold Rolled 20 Gauge Steel | **OPTICS** N/A

**WARRANTY** 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

**FIXTURE RATINGS & CERTIFICATIONS** Union Made ETL Listed | Made In The USA Damp Location Rated




### DRIVERS

For Wiring Diagrams [Click Here](#)



**ELECTRICAL** Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

### EXTRUSION DIMENSIONS

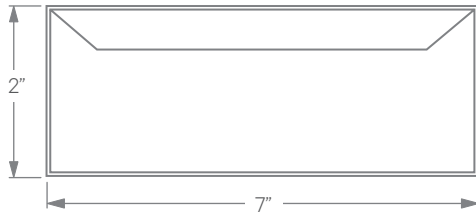

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	7.25 W/ft	745 lm/ft	102 LPW
Low (LTG2)	5 W/ft	530 lm/ft	105 LPW
High (LTG3)	10 W/ft	870 lm/ft	100 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

### ORDERING

1 - FIXTURE ID	2 - LENGTH	3 - COLOR TEMP	4 - LED SYSTEM	5 - VOLTAGE	6 - DRIVER
ECO LED UP	4 - 4 ft 8 - 8 ft	30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI TW* - Tunable White RGBW** - RGB + 3000K <small>*Must use DMX or TW10 Driver **Must use DMX Driver</small>	LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	UNV - Universal (120/277V)	DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

7 - FINISH	8 - MOUNTING	9 - OTHER OPTIONS
W - White (Standard) BLK* - Black CC* - Custom Color (provide RAL#)	AC - Air Craft Cable (50") WM - Wall Mount	EM 120V - Emergency Pack EM 277V - Emergency Pack EMCKT - Emergency Circuit

\*White cord and canopy provided. Must specify for other requests.

DATE

PROJECT

FIRM

TYPE

## DIMENSIONS/SUSPENSION POINTS

