


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

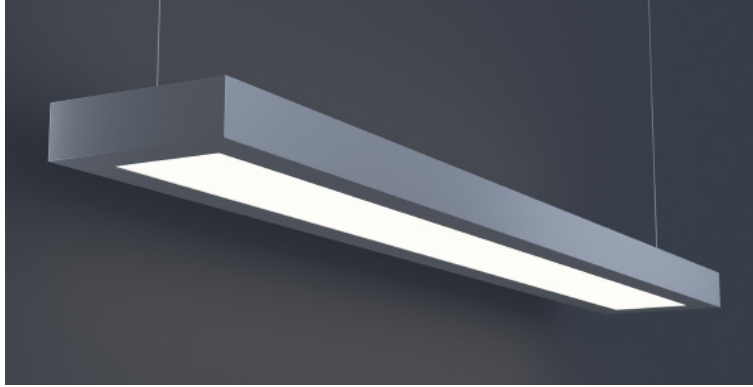

Linear, architectural luminaire with direct and indirect lighting. For use in indoor applications where a pendant LED luminaire is required. Air craft cable mounted. Available in custom colors and light outputs.

FEATURES

- 25% Direct And 75% Indirect Light Distribution
- Continuous Row Mounting
- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K & 4000K Color Temperatures Available
- Enlighted/Wattstopper Sensors Available

APPLICATIONS Offices, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Durable Cold Rolled 20 Gauge Steel | **OPTICS** Acrylic Diffuse Lens

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available


FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated



ELECTRICAL Integral Driver With 0-10V 10% Dimming Standard. Several Driver Options Available. See Below For Lutron Dimming Information

2-Wire Forward Phase; Hi-Lume 1% Dimming, Only Available For 120V	LTEA
3-Wire EcoSystem; Hi-lume 1% Dimming	L3DA
Digital EcoSystem; Hi-lume 1% Dimming, 'Soft-on Fade-to-black' (Required for Daylighting)	LDE1
5 Series EcoSystem; 5% Dimming	LDE5

EXTRUSION DIMENSIONS

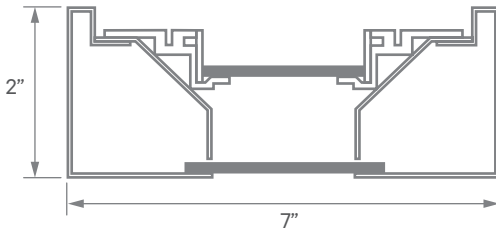

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	11.5 W/ft	1,150Lm/ft	100 Lm/W
Low (LTG2)	10 W/ft	1,025 Lm/ft	101 Lm/W
High (LTG3)	13 W/ft	1,290 Lm/ft	99 Lm/W

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

ORDERING

1	2	3	4	5	6	7	8	9	10	11
---	---	---	---	---	---	---	---	---	----	----

1 - FIXTURE ID ECO LED	2 - LENGTH 4 - 4 ft 8 - 8 ft	3 - COLOR TEMP 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K *Must use DMX Driver (Remote)	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) LTEA* - Lutron 2-wire 1% Dimming L3DA* - Lutron 3-wire 1% Dimming LDE1* - Lutron Digital EcoSystem LDE5* - 5 Series EcoSystem; 5% Dimming *Refer to 'Electrical' Information Above DMX - For Color Tuning and RGBW
7 - FINISH W - White (Standard) CC - Custom Color (provide RAL#)	8 - MOUNTING AC - Air Craft Cable (50") WB - Wall Bracket	9 - CONTROL EIS - Integral Sensor by Enlighted WIS - Integral Sensor by Wattstopper	10 - OPTICS SD - Standard Diffuser	11 - OPTIONS EM 120V - Emergency Pack EM 277V - Emergency Pack	







DATE

PROJECT

FIRM


TYPE

DIMENSIONS/SUSPENSION POINTS

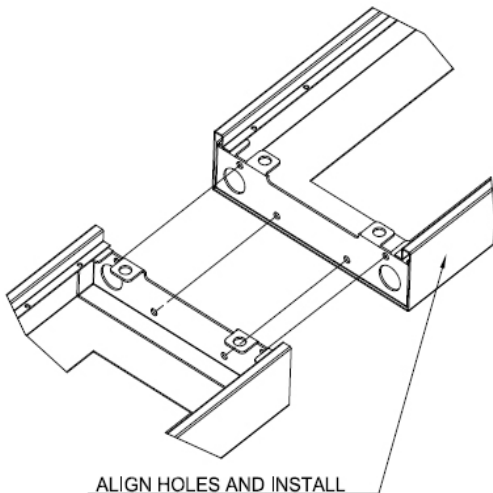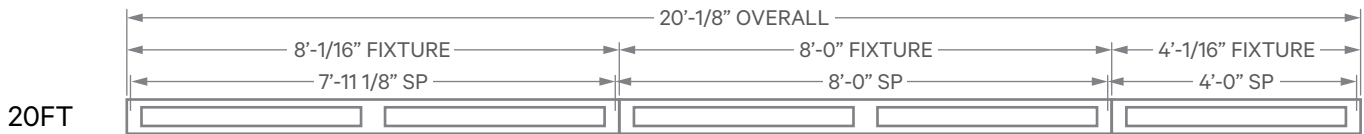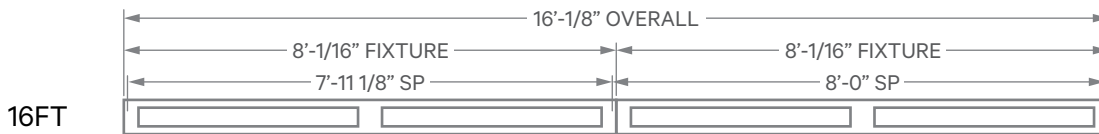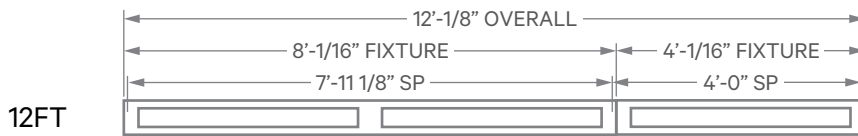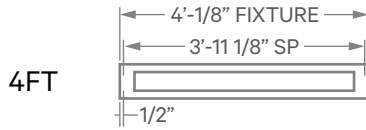

ALIGN HOLES AND INSTALL
USE HARDWARE PROVIDED.


PHOTOMETRICS

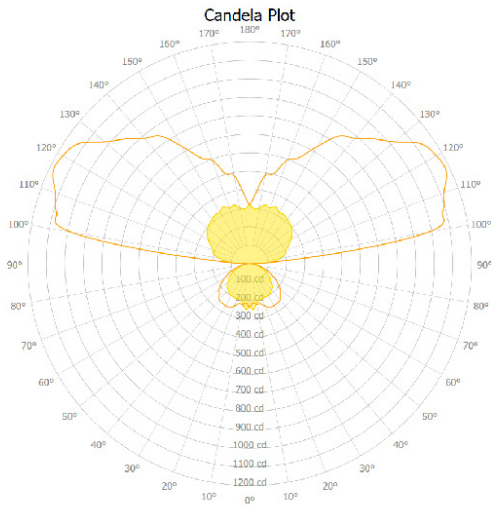

ECO LED 4FT LTG1 3500K
 DELIVERED LUMENS: 4,630Lm
 TOTAL WATTS: 46W
 EFFICACY: 100 Lumens/Watt

ZONAL LUMEN SUMMARY


ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	195.18	3.70	4.22
0.00 - 40.00	337.20	6.39	7.28
0.00 - 60.00	637.72	12.09	13.77
0.00 - 90.00	831.07	15.76	17.95
90.00 - 120.00	1822.72	34.56	39.36
90.00 - 150.00	3396.52	64.39	73.35
90.00 - 180.00	3799.42	72.03	82.05
0.00 - 180.00	4630.49	87.79	100.0

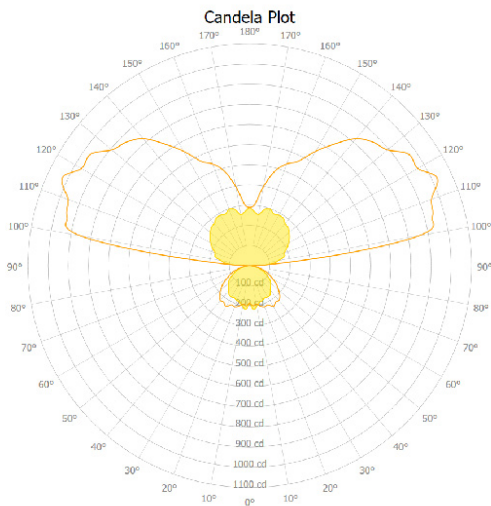

ECO LED 4FT LTG2 3500K
 DELIVERED LUMENS: 4,103Lm
 TOTAL WATTS: 40W
 EFFICACY: 101 Lumens/Watt

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	172.00	3.68	4.19
0.00 - 40.00	296.66	6.35	7.23
0.00 - 60.00	560.95	12.00	13.67
0.00 - 90.00	732.61	15.68	17.85
90.00 - 120.00	1612.04	34.50	39.28
90.00 - 150.00	3013.40	64.49	73.43
90.00 - 180.00	3371.08	72.14	82.15
0.00 - 180.00	4103.69	87.82	100.00

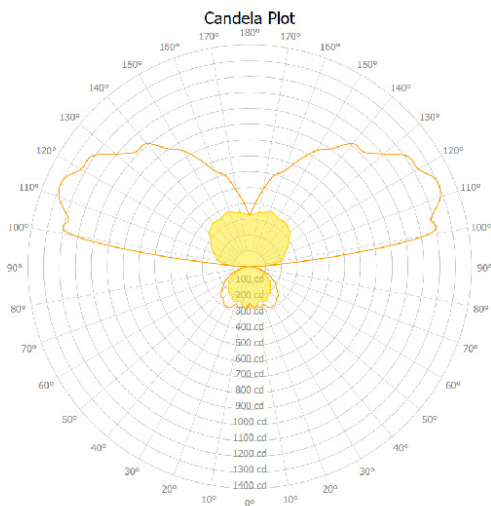

ECO LED 4FT LTG3 3500K
 DELIVERED LUMENS: 5,162Lm
 TOTAL WATTS: 52W
 EFFICACY: 99 Lumens/Watt

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXTURE
0.00 - 30.00	215.48	3.67	4.17
0.00 - 40.00	371.77	6.32	7.20
0.00 - 60.00	701.49	11.93	13.59
0.00 - 90.00	917.50	15.61	17.78
90.00 - 120.00	2031.44	34.56	39.36
90.00 - 150.00	3793.96	64.54	73.50
90.00 - 180.00	4244.08	72.20	82.22
0.00 - 180.00	5161.58	87.81	100.00