


DATE _____ PROJECT _____ FIRM _____ TYPE _____

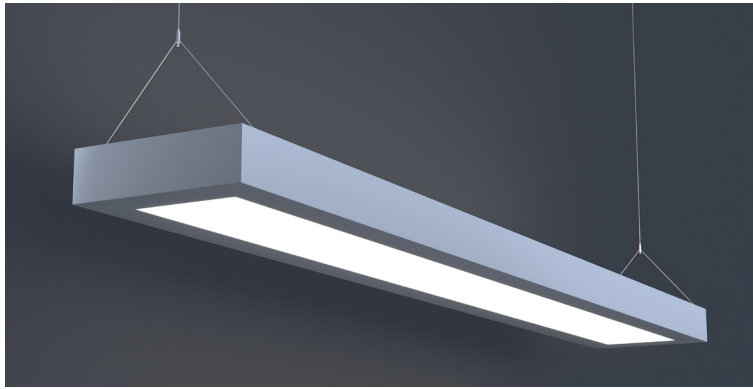

FEATURES

- 25% Direct and 75% Indirect Light Distribution
- Continuous Row Mounting
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K, & 5000K Color Temperatures Available
- Available with PoE- [See More](#)

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas, & Corridors

FINISH Standard Powder-Coated White. Custom RAL Colors Available

CONSTRUCTION Durable Cold Rolled 20 Gauge Steel

OPTICS Extruded High Transmission Satin Acrylic Lens with No LED Imaging



*Not all outputs and configurations listed, consult factory


DRIVERS, SENSORS, & POE



For Wiring Diagrams, POE, and Sensor Information Click [Here](#)

ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

EXTRUSION DIMENSIONS

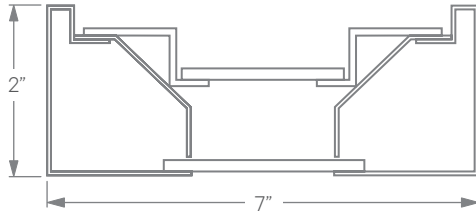

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	11.5 W/ft	1,150 lm/ft	100 LPW
Low (LTG2)	8 W/ft	810 lm/ft	101 LPW
High (LTG3)	16.25 W/ft	1,608 lm/ft	99 LPW

Based on a 90CRI, 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING



1 - FIXTURE ID

ECO LED

2 - LENGTH

- 4 - 4 ft
- 8 - 8 ft
- X' - Specify Length for Continuous Row Mounting (Increments of 4 ft)

3 - COLOR TEMP

- 27 - 2700K/90 CRI
- 30 - 3000K/90 CRI
- 35 - 3500K/90 CRI
- 40 - 4000K/90 CRI
- 50 - 5000K/90 CRI
- WD* - Warm Dim 2200K-3000K
- TW** - Tunable White 2700K-6500K

*Requires WD10 Driver
**Requires TW10 Driver

4 - LED SYSTEM

- LTG1 - Standard
- LTG2 - Low
- LTG3 - High
- LTGC - Custom Output

5 - VOLTAGE

- UNV - Universal (120/277V)
- 347V* - 347V

*Must use DB Driver

6 - DRIVER

- DB - Standard 1% Dimming (0-10V)
- DB.1% - 0.1% Dimming (0-10V)
- ELV-TRI - 2-wire 1% Dimming (120V only) ELV and TRIAC Compatible
- LDE1 - Lutron Digital EcoSystem
- LDE5 - 5 Series EcoSystem; 5% Dimming
- DALI - DALI-2 Driver
- PoE - Power over Ethernet. Consult Factory for Compatibility
- TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)
- WD10 - 0-10V Driver For Warm Dimming

7 - FINISH

- W - White (Standard)
- BLK* - Black
- CC* - Custom Color (provide RAL#)

*White cord and canopy provided. Must specify for other requests.

8 - MOUNTING

- AC - Air Craft Cable (50")
- WM - Wall Mount

9 - SENSORS & CONTROLS (OPTIONAL)

- EIS - Enlighted Sensor
- WISD - Wattstopper Daylight Sensor
- WISM - Wattstopper Occupancy Sensor
- ECS - Eaton WaveLinx Sensor
- ACM - Acuity nLight Module Only
- ACS - Acuity nLight Sensor
- CCS - Casambi Module
- TRI - Occupancy/Daylight Sensor

NOTE: For other control systems not listed consult factory.

10 - OTHER OPTIONS

- BAF - Baffle/Louwer
- EM 120V - Emergency Pack
- EM 277V - Emergency Pack
- EMCKT - Emergency Circuit






DATE

PROJECT


FIRM

TYPE

DIMENSIONS/SUSPENSION POINTS

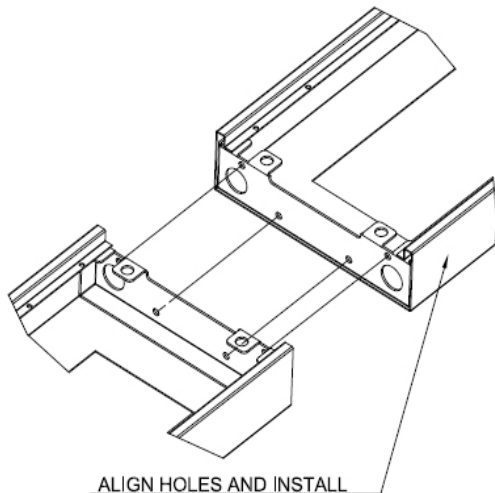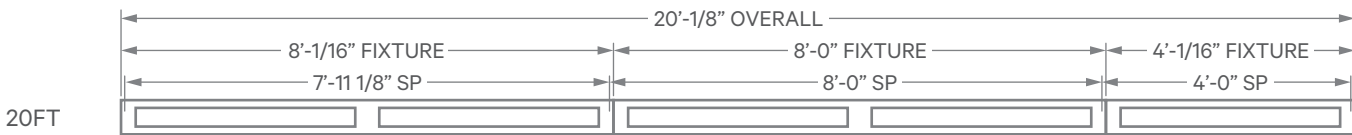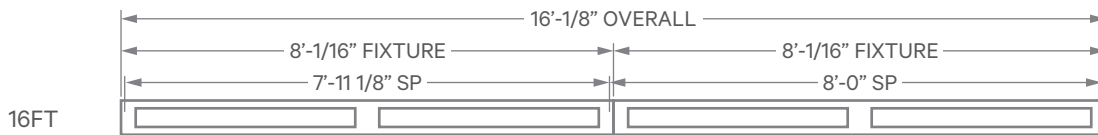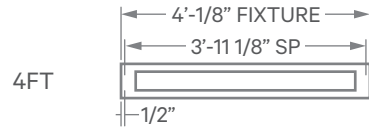

ALIGN HOLES AND INSTALL
USE HARDWARE PROVIDED.

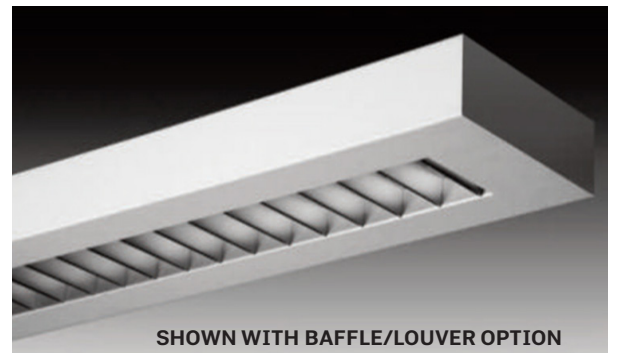

SHOWN WITH BAFFLE/LOUVER OPTION