

DATE _____ PROJECT _____ FIRM _____ TYPE _____



Round, architectural luminaire with nominal 3 ft diameter. Custom-spun steel and specially formed concave lens. Suitable for suspended installation using either aircraft cable or pendant stems, or surface mounted.

FEATURES

- Custom Color & Outputs Available
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Heavy Gauge Cold Rolled Steel Housing. Spun Steel Trim | **OPTICS** 0.125" Thick Concave Opal Lens. Optional 1/2" Drop

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated




DRIVERS

For Wiring Diagrams [Click Here](#)



ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

EXTRUSION DIMENSIONS

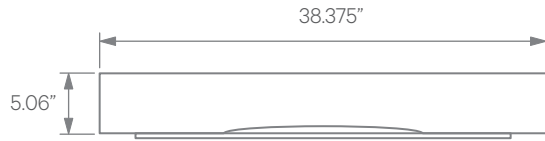

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	65 W	5,925 lm	90 LPW
Low (LTG2)	40 W	3,600 lm	92 LPW
High (LTG3)	76 W	6,500 lm	86 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING 1 2 3 4 5 6 7 8 9 10

- 1 - FIXTURE ID**
PRD LED
- 2 - SIZE**
3 - 3 ft
- 3 - COLOR TEMP**
27 - 2700K/90 CRI
30 - 3000K/90 CRI
35 - 3500K/90 CRI
40 - 4000K/90 CRI
50 - 5000K/90 CRI
TW* - Tunable White
RGBW** - RGB + 3000K
*Must use DMX or TW10 Driver
**Must use DMX Driver
- 4 - LED SYSTEM**
LTG1 - Standard
LTG2 - Low
LTG3 - High
LTGC - Custom Output
- 5 - VOLTAGE**
UNV - Universal (120/277V)
- 6 - DRIVER**
DB - Standard Dimming (0-10V)
DB1% - 1% Dimming (0-10V)
DB.1% - 0.1% Dimming (0-10V)
LTEA - Lutron 2-wire 1% Dimming (120V only)
LDE1 - Lutron Digital EcoSystem
LDE5 - 5 Series EcoSystem; 5% Dimming
PoE - Power over Ethernet. Consult Factory for Compatibility
DMX - For Color Tuning and RGBW (Remote)
TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

- 7 - FINISH**
W - White (Standard)
BLK* - Black
CC* - Custom Color (provide RAL#)
*White cord and canopy provided. Must specify for other requests.
- 8 - MOUNTING**
AC - Air Craft Cable (50")
SM - Surface Mount
PS - Pendant Stem (3 stems per fixture)
- 9 - OPTICS**
SD - Standard Diffuser
DL - 1/2" Drop Lens
- 10 - OTHER OPTIONS**
EM 120V - Emergency Pack
EM 277V - Emergency Pack
EMCKT - Emergency Circuit