

DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_



Round, architectural luminaire with nominal 4 ft diameter. Custom-spun steel and specially formed concave lens. Suitable for suspended installation using either aircraft cable or pendant stems, or surface mounted.

### FEATURES

- Custom Color & Outputs Available
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available

**APPLICATIONS** Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

**CONSTRUCTION** Heavy Gauge Cold Rolled Steel Housing. Spun Steel Trim | **OPTICS** 0.125" Thick Concave Opal Lens. Optional 1/2" Drop

**WARRANTY** 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

**FIXTURE RATINGS & CERTIFICATIONS** Union Made ETL Listed | Made In The USA Damp Location Rated




**DRIVERS**  
For Wiring Diagrams [Click Here](#)



**ELECTRICAL** Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

### EXTRUSION DIMENSIONS

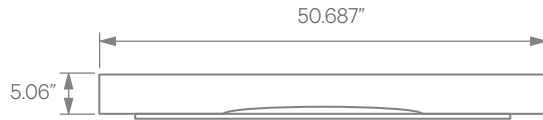

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	138 W	12,695 lm	92 LPW
Low (LTG2)	87 W	8,090 lm	93 LPW
High (LTG3)	166 W	14,545 lm	88 LPW

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

**ORDERING** 1 2 3 4 5 6 7 8 9 10

**1 - FIXTURE ID** PRD LED

**2 - SIZE** 4 - 4 ft

**3 - COLOR TEMP**  
 27 - 2700K/90 CRI  
 30 - 3000K/90 CRI  
 35 - 3500K/90 CRI  
 40 - 4000K/90 CRI  
 50 - 5000K/90 CRI  
 TW\* - Tunable White  
 RGBW\*\* - RGB + 3000K  
 \*Must use DMX or TW10 Driver  
 \*\*Must use DMX Driver

**4 - LED SYSTEM**  
 LTG1 - Standard  
 LTG2 - Low  
 LTG3 - High  
 LTGC - Custom Output

**5 - VOLTAGE**  
 UNV - Universal (120/277V)

**6 - DRIVER**  
 DB - Standard Dimming (0-10V)  
 DB1% - 1% Dimming (0-10V)  
 DB.1% - 0.1% Dimming (0-10V)  
 LTEA - Lutron 2-wire 1% Dimming (120V only)  
 LDE1 - Lutron Digital EcoSystem  
 LDE5 - 5 Series EcoSystem; 5% Dimming  
 DMX - For Color Tuning and RGBW (Remote)  
 TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

**7 - FINISH**  
 W - White (Standard)  
 BLK\* - Black  
 CC\* - Custom Color (provide RAL#)  
 \*White cord and canopy provided. Must specify for other requests.

**8 - MOUNTING**  
 AC - Air Craft Cable (50")  
 SM - Surface Mount  
 PS - Pendant Stem (3 stems per fixture)

**9 - OPTICS**  
 SD - Standard Diffuser  
 DL - 1/2" Drop Lens

**10 - OTHER OPTIONS**  
 EM 120V - Emergency Pack  
 EM 277V - Emergency Pack  
 EMCKT - Emergency Circuit