

DATE _____

JOB NAME _____

TYPE _____

Features **Applications**

- | | |
|---|---|
| <ul style="list-style-type: none"> • Single diffuser • Shallow design • Clean appearance, no exposed fasteners | <ul style="list-style-type: none"> • Office Areas • Retail Stores • Class Rooms • Corridors |
|---|---|

Series	Size	LED System	Color Temp	Voltage	Mounting	Options
KSR1 LED	2x2	LTG1- Standard LTG2- Low LTG3- High C- Custom Package (ie-C5000Lm)	2700K 3000K 3500K 4000K 5000K	120 277 UNV	F-Flange NT-No Trim (spackle flange) T- Tee Grid* SG- Slot Grid	EM-EM Pack DB- Standard 10% Dimming Driver (0-10V) DB1%- 1% Dimming Driver (0-10V) LUTRON 2- Hi-Lume Dimming Driver (1% 2-wire control) LUTRON 3- Hi-Lume Dimming Driver (1% 3-wire control)

Ordering Example: KSR1 LED-2X2-LTG1-3500K-UNV-SM-MS

*Standard Tee is 9/16". **Must** specify if 15/16"

LED System Information

Options:

NOMINAL PACKAGE	NOMINAL SYSTEM WATTS	NOMINAL DELIVERED LUMENS
LTG1 (STANDARD)	35W	2985Lm
LTG2 (LOW)	33W	2630Lm
LTG3 (HIGH)	38W	3305Lm

Color Temperature Pro-rate:

CCT	OUTPUT
2700K	93%
3000K	95%
3500K	97%
4000K	100%
5000K	103%

***FOR ANY CUSTOM LED PACKAGE REQUESTS CONSULT FACTORY

Details

Application Features: Premium grade, recessed, high performance direct/indirect architectural luminaire with single perforated metal lamp shield and translucent acrylic diffuser For use is indoor applications where a LED luminaire with soft, low-glare illumination and modern styling is required. Available in 2x2 and 2x4 configurations. Shallow design accommodates mounting in obstructed ceiling plenums.

Construction: Die formed and spot welded, 20 ga. cold rolled steel housing with precision formed, cold rolled steel reflector and die formed cold rolled steel perforated lamp shield with translucent acrylic diffuser. Sufficient knock-outs provided on back of housing for flexible conduit attachment.

Finish: Powder painted matte white.


Electrical: Integral Driver.

Approvals: UL Listed for damp location.

Mounting: Recessed mounting for T-Bar, Slot Grid or with Flange Kit for sheetrock ceiling installations.

Optics: Arched reflector and translucent acrylic diffuser.

Options: Emergency Battery Backup, Dimming Ballast, Separate Circuit, Diffuser Only, Shallow Parabolic Louver, Air Supply/Return Slots, 6' Whips.

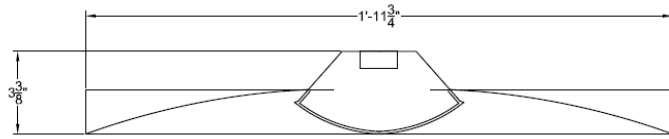

CROSS SECTION

DISCLAIMER: CORONET INC RESERVES THE RIGHT TO MAKE ANY DESIGN CHANGES FOR CONTINUOUS IMPROVEMENT WHICH WILL NOT AFFECT THE OVERALL APPEARANCE OR PERFORMANCE. ALL CEILINGS ARE TO BE ADEQUATELY REINFORCED BY OTHERS BEFORE INSTALLATION. ALL FIXTURES ARE TO BE WIRED BY A CERTIFIED ELECTRICIAN ONLY. THIS INFORMATION IS PROPERTY OF CORONET INC., AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT ANY WRITTEN CONSENT OF CORONET INC.