

DATE	PROJECT	FIRM	TYPE
------	---------	------	------



Recessed, architectural luminaire with frosted acrylic diffuse lenses. Durable steel housing. Suitable for grid and sheetrock ceilings. Custom outputs available.

FEATURES

- Custom Outputs Available
- Damp Location Rated
- CRI 90+ Standard
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Enlighted/Wattstopper Sensors Available

APPLICATIONS Offices, Lobbies, Retail Stores, Reception Areas & Corridors

CONSTRUCTION Heavy Gauge Cold Rolled Steel Housing | **OPTICS** Two Outer And One Center Frosted Acrylic Lenses


WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated



ELECTRICAL Integral Driver With 0-10V 10% Dimming Standard. Several Driver Options Available. See Below For Lutron Dimming Information

EXTRUSION DIMENSIONS

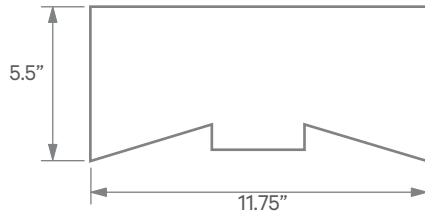

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	29 W	2,788 Lm	96 Lm/W
Low (LTG2)	20 W	2,045 Lm	101 Lm/W
High (LTG3)	35 W	3,230 Lm	92 Lm/W

Based on a 4000K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

ORDERING

1 - FIXTURE ID TDJA LED	2 - LENGTH 1x4	3 - COLOR TEMP 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K *Must use DMX Driver (Remote)	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER (Remote) DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V) L3DA - Lutron 3-wire 1% Dimming LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming DMX - For Color Tuning and RGBW
-----------------------------------	--------------------------	---	---	--	---

7 - FINISH W - White (Standard)	8 - MOUNTING T - 9/16" Tee Grid T15 - 15/16" Tee Grid F - Flange SG - Slot Grid/Interlude	9 - OPTICS SD - Standard Diffuser	10 - CONTROL (Optional) NC - No Control (Standard) EIS - Integral Sensor by Enlighted WIS - Integral Sensor by Wattstopper	11 - CIRCUIT (Optional) WH - 6 ft Whip, Preinstalled AR - Air Return EM 120V - Emergency Pack EM 277V - Emergency Pack
---	--	---	--	---