





DATE	PROJECT	FIRM	TYPE
------	---------	------	------

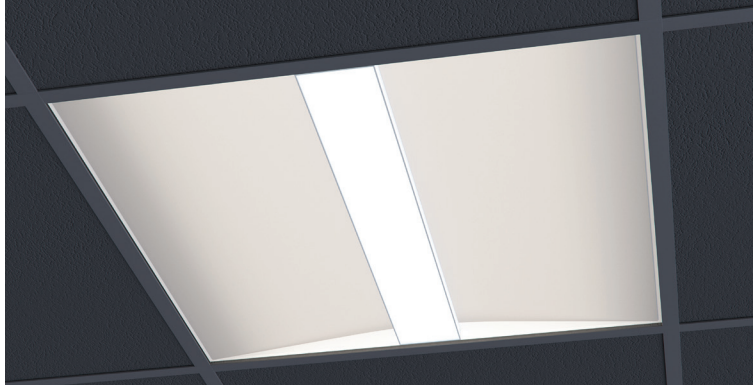

Recessed, architectural luminaire with frosted acrylic diffuse lenses. Durable steel housing. Suitable for grid and sheetrock ceilings. Custom outputs available.


FEATURES

- Custom Outputs Available
- Damp Location Rated
- CRI 90+ Standard
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Enlighted/Wattstopper Sensors Available

APPLICATIONS	Offices, Lobbies, Retail Stores, Reception Areas & Corridors		
CONSTRUCTION	Heavy Gauge Cold Rolled Steel Housing	OPTICS	Two Outer And One Center Frosted Acrylic Lenses
WARRANTY	5 Year Limited Warranty (Covers Standard Components)	FINISH	Standard Powder-Coated White
FIXTURE RATINGS & CERTIFICATIONS	Union Made ETL Listed	Made In The USA Damp Location Rated	  

ELECTRICAL	Integral Driver With 0-10V 10% Dimming Standard. Several Driver Options Available. See Below For Lutron Dimming Information
-------------------	---

EXTRUSION DIMENSIONS

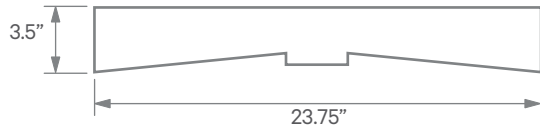

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	29 W	2,795 Lm/ft	96 Lm/W
Low (LTG2)	20 W	2,050 Lm/ft	101 Lm/W
High (LTG3)	35 W	3,245 Lm/ft	92 Lm/W

Based on a 4000K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

ORDERING	1	2	3	4	5	6	7	8	9	10	11
1 - FIXTURE ID	2 - LENGTH										
TDJA LED	2x2										
	3 - COLOR TEMP			4 - LED SYSTEM		5 - VOLTAGE		6 - DRIVER (Remote)			
	27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K *Must use DMX Driver (Remote)			LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)		UNV - Universal (120/277V)		DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V) L3DA - Lutron 3-wire 1% Dimming LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming DMX - For Color Tuning and RGBW			
7 - FINISH	8 - MOUNTING		9 - OPTICS		10 - CONTROL (Optional)			11 - CIRCUIT (Optional)			
W - White (Standard)	T - 9/16" Tee Grid T15 - 15/16" Tee Grid F - Flange SG - Slot Grid/Interlude		SD - Standard Diffuser		NC - No Control (Standard) EIS - Integral Sensor by Enlighted WIS - Integral Sensor by Wattstopper			WH - 6 ft Whip, Preinstalled AR - Air Return EM 120V - Emergency Pack EM 277V - Emergency Pack			