

DATE	PROJECT	FIRM	TYPE
------	---------	------	------



Recessed, architectural luminaire with frosted acrylic diffuse lenses. Durable steel housing. Suitable for grid and sheetrock ceilings. Custom outputs available.

### FEATURES

- Custom Outputs Available
- Damp Location Rated
- CRI 90+ Standard
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Enlighted/Wattstopper Sensors Available
- DLC Listed

**APPLICATIONS** Offices, Lobbies, Retail Stores, Reception Areas & Corridors

**CONSTRUCTION** Heavy Gauge Cold Rolled Steel Housing | **OPTICS** Two Outer And One Center Frosted Acrylic Lenses


**WARRANTY** 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White

**FIXTURE RATINGS & CERTIFICATIONS** Union Made ETL Listed | Made In The USA Damp Location Rated



**ELECTRICAL** Integral Driver With 0-10V 10% Dimming Standard. Several Driver Options Available. See Below For Lutron Dimming Information

### EXTRUSION DIMENSIONS

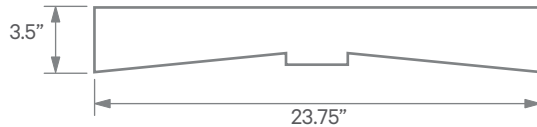

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	61 W	5,600 Lm/ft	90 Lm/W
Low (LTG2)	42 W	3,845 Lm/ft	92 Lm/W
High (LTG3)	73 W	6,400 Lm/ft	88 Lm/W

Based on a 4000K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

### ORDERING

<b>1 - FIXTURE ID</b> TDJA LED	<b>2 - LENGTH</b> 2x4	<b>3 - COLOR TEMP</b> 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K *Must use DMX Driver (Remote)	<b>4 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER (Remote)</b> DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V) L3DA - Lutron 3-wire 1% Dimming LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming DMX - For Color Tuning and RGBW
<b>7 - FINISH</b> W - White (Standard)	<b>8 - MOUNTING</b> T - 9/16" Tee Grid T15 - 15/16" Tee Grid F - Flange SG - Slot Grid/Interlude	<b>9 - OPTICS</b> SD - Standard Diffuser	<b>10 - CONTROL (Optional)</b> NC - No Control (Standard) EIS - Integral Sensor by Enlighted WIS - Integral Sensor by Wattstopper	<b>11 - CIRCUIT (Optional)</b> WH - 6 ft Whip, Preinstalled AR - Air Return EM 120V - Emergency Pack EM 277V - Emergency Pack	