

DATE _____ PROJECT _____ FIRM _____ TYPE _____



Round, architectural luminaire with 18 inch diameter. For use in indoor applications where an LED luminaire is required; great for lobbies and corridors. Suitable for tee grid and drywall installation.

FEATURES

- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Heavy Gauge, Cold Rolled Steel Housing. Spun Steel Trim | **OPTICS** .125" Thick Concave Opal Lens

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated




DRIVERS & SENSORS



For Wiring Diagrams and Sensor Information Click [Here](#)

ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

EXTRUSION DIMENSIONS

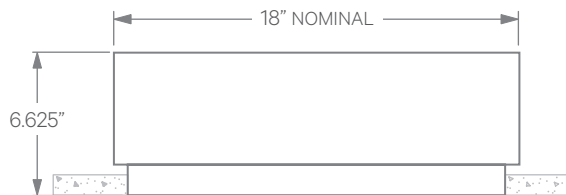

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	28 W	1,930 lm
Low (LTG2)	16 W	1,180 lm
High (LTG3)	32 W	2,230 lm

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING

1 - FIXTURE ID	2 - SIZE	3 - COLOR TEMP	4 - LED SYSTEM	5 - VOLTAGE	6 - DRIVER
RRD LED	18 - 18 in.	27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW** - RGB + 3000K *Must use DMX or TW10 Driver **Must use DMX Driver	LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	UNV - Universal (120/277V)	DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.1% - 0.1% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming (120V only) LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming PoE - Power over Ethernet. Consult Factory for Compatibility DMX - For Color Tuning and RGBW (Remote) TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

7 - FINISH	8 - MOUNTING	9 - CIRCUIT (Optional)	10 - OTHER OPTIONS
W - White (Standard) CC - Custom Color (provide RAL#)	T - 9/16" Tee Grid SR - Sheetrock	EM 120V - Emergency Pack EM 277V - Emergency Pack	WH6 - 6ft Whips Preinstalled