

DATE _____ PROJECT _____ FIRM _____ TYPE _____



Round, architectural luminaire with 6 ft diameter. For use in indoor applications where an LED luminaire is required; great for lobbies and corridors. Suitable for tee grid and drywall installation.

FEATURES

- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Heavy Gauge, Cold Rolled Steel Housing. Spun Steel Trim | **OPTICS** .125" Thick Concave Opal Lens

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated




DRIVERS & SENSORS



For Wiring Diagrams and Sensor Information Click [Here](#)

ELECTRICAL Integral Driver with 0-10V Dimming Standard. Several Driver Options Available

EXTRUSION DIMENSIONS

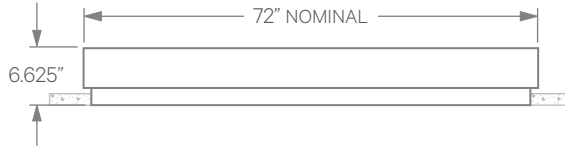

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	240 W	19,200 lm
Low (LTG2)	195 W	15,795 lm
High (LTG3)	300 W	23,400 lm

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING

1 - FIXTURE ID | **2 - SIZE** | **3 - COLOR TEMP** | **4 - LED SYSTEM** | **5 - VOLTAGE** | **6 - DRIVER**

RRD LED | **6 - 6 ft** | **27 - 2700K/90 CRI**
30 - 3000K/90 CRI
35 - 3500K/90 CRI
40 - 4000K/90 CRI
50 - 5000K/90 CRI
TW* - Tunable White
RGBW** - RGB + 3000K
*Must use DMX or TW10 Driver
**Must use DMX Driver

LTG1 - Standard
LTG2 - Low
LTG3 - High
LTGC - Custom Output

UNV - Universal (120/277V)

DB - Standard Dimming (0-10V)
DB1% - 1% Dimming (0-10V)
DB.1% - 0.1% Dimming (0-10V)
LTEA - Lutron 2-wire 1% Dimming (120V only)
LDE1 - Lutron Digital EcoSystem
LDE5 - 5 Series EcoSystem; 5% Dimming
DMX - For Color Tuning and RGBW (Remote)
TW10 - Dual Channel, 0-10V For Color Tuning (CCT and Intensity Control)

7 - FINISH | **8 - MOUNTING** | **9 - CIRCUIT (Optional)** | **10 - OTHER OPTIONS**

W - White (Standard)
CC - Custom Color (provide RAL#)

T - 9/16" Tee Grid
SR - Sheetrock

EM 120V - Emergency Pack
EM 277V - Emergency Pack

WH6 - 6ft Whips Preinstalled