



DATE	PROJECT	FIRM	TYPE
------	---------	------	------

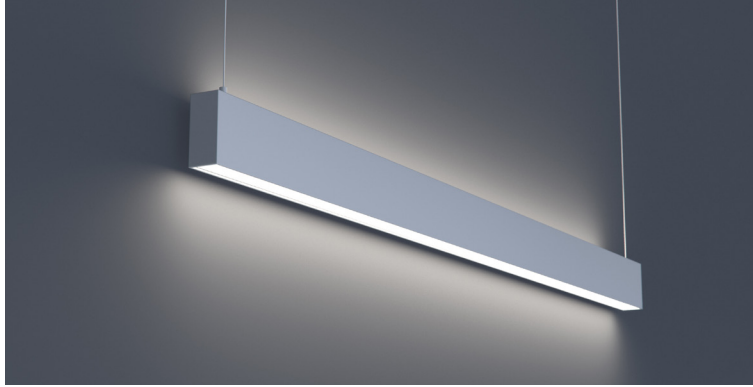

Narrow, linear luminaire with direct and indirect lighting. For use in indoor applications where an LED luminaire with very narrow profile providing continuous light is required.


### FEATURES

- Available In Custom Lengths & Long Runs To 1/16" Accuracy
- Optional 'Power Over Wire' System
- Corners & Patterns Available (See Page 2)
- Damp Location Rated
- CRI 90+ Standard
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Rated Life- 100,000 hours at L70; 50,000 hours at L90

<b>APPLICATIONS</b>	Offices, Reception Areas & Corridors			
<b>CONSTRUCTION</b>	Extruded Aluminum Housing With Die Cast Aluminum End Caps	<b>OPTICS</b>	Acrylic Diffuse Lens Direct, Opal White Film Indirect	
<b>WARRANTY</b>	5 Year Limited Warranty (Covers Standard Components)		<b>FINISH</b>	Standard Powder-Coated White. Custom RAL Colors Available
<b>FIXTURE RATINGS &amp; CERTIFICATIONS</b>	Union Made ETL Listed	Made In The USA Damp Location Rated		

**ELECTRICAL** Remote Driver With 0-10V 10% Dimming Standard. Several Driver Options Available. See Below For Lutron Dimming Information

### EXTRUSION DIMENSIONS



### LED SYSTEM INFORMATION

	Nominal System Watts		Nominal Delivered Lumens	
	DIRECT	INDIRECT	DIRECT	INDIRECT
Standard (LTG1)	5.25 W/ft	5.25 W/ft	315 Lm/ft	510 Lm/ft
Low (LTG2)	3.5 W/ft	3.5 W/ft	212 Lm/ft	340 Lm/ft
High (LTG3)	7.5 W/ft	7.5 W/ft	400 Lm/ft	670 Lm/ft

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.


<b>ORDERING</b>	1	2	3	4-IN	4-D	5	6	7	8	9
-----------------	---	---	---	------	-----	---	---	---	---	---

<b>1 - FIXTURE ID</b> RUSH UP/DN	<b>2 - LENGTH</b> 4 - 4 ft 8 - 8 ft x'-x" - Custom (specify length)  **Patterns available consult factory	<b>3 - COLOR TEMP</b> 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K  *Must use DMX Driver (Remote)	<b>4 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER</b> DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming L3DA - Lutron 3-wire 1% Dimming LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming DMX - For Color Tuning and RGBW
<b>7 - FINISH</b> W - White (Standard) CC - Custom Color (provide RAL#)	<b>8 - MOUNTING</b> AC - Aircraft Cable (50") ACP - Power Over Aircraft Cable	<b>9 - CIRCUIT</b> SC - Separate Circuit EM 120V - Emergency Pack EM 277V - Emergency Pack			


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

## CORNERS & PATTERNS


Available with illuminated corners, angles, and custom patterns. **Must consult factory for custom corners and patterns.**




Square Patterns



T Patterns (Unlit Intersection)



Custom Angles



Custom Patterns

## ACP- 'Power Over Air Craft Cable' Option:

### Individual Separate Circuit (Up to 8ft Only)



### Continuous Runs

