


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_

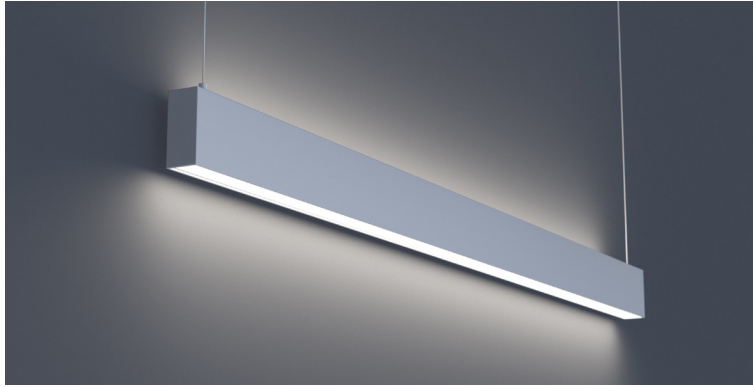

Narrow, linear luminaire with direct and indirect lighting. For use in indoor applications where an LED luminaire with very narrow profile providing continuous light is required.

### FEATURES

- Available In Made To Measure Lengths Specifiable In 4" Increments
- Patterns Available (See Page 2)
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

**APPLICATIONS** Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

**CONSTRUCTION** Extruded Aluminum Housing with Die Cast Ends. Formed Steel Gear Tray | **OPTICS** Acrylic Diffuse Lens Direct, Opal White Film Indirect

**WARRANTY** 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

**FIXTURE RATINGS & CERTIFICATIONS** Union Made ETL Listed | Made In The USA Damp Location Rated




### DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)



**ELECTRICAL** Remote Driver with 0-10V Dimming Standard or 'Power Over Wire' System Which Eliminates Power Feed Cord By Combining The Aircraft Cable and Power Feed

### EXTRUSION DIMENSIONS



### LED SYSTEM INFORMATION

|                 | Nominal System Watts |           | Nominal Delivered Lumens |           |
|-----------------|----------------------|-----------|--------------------------|-----------|
|                 | DIRECT               | INDIRECT  | DIRECT                   | INDIRECT  |
| Standard (LTG1) | 5.25 W/ft            | 5.25 W/ft | 315 lm/ft                | 510 lm/ft |
| Low (LTG2)      | 3.5 W/ft             | 3.5 W/ft  | 212 lm/ft                | 340 lm/ft |
| High (LTG3)     | 7.5 W/ft             | 7.5 W/ft  | 400 lm/ft                | 670 lm/ft |

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

**ORDERING** 1 2 3 IN - 4-DIRECT 5 6 7 8 9

| 1 - FIXTURE ID | 2 - LENGTH  | 3 - COLOR TEMP   | 4 - LED SYSTEM  | 5 - VOLTAGE  | 6 - DRIVER  |
|----------------|---|--|---|--|---|
| RUSH UP/DN     | 4 - 4 ft<br>8 - 8 ft<br>X'-X" - Specify Length (4" Increments)<br>PAT - Pattern (Consult Factory) | 27 - 2700K/90 CRI<br>30 - 3000K/90 CRI<br>35 - 3500K/90 CRI<br>40 - 4000K/90 CRI | IN - INDIRECT<br>LTG1 - Standard<br>LTG2 - Low<br>LTG3 - High<br>LTGC - Custom Output | D - DIRECT<br>LTG1 - Standard<br>LTG2 - Low<br>LTG3 - High<br>LTGC - Custom Output | UNV - Universal (120/277V)<br>DB - Standard Dimming (0-10V)<br>DB1% - 1% Dimming (0-10V)<br>DB.1% - 0.1% Dimming (0-10V)<br>LTEA - Lutron 2-wire 1% Dimming (120V only)<br>LDE1 - Lutron Digital EcoSystem<br>LDE5 - 5 Series EcoSystem; 5% Dimming<br>PoE - Power over Ethernet. Consult Factory for Compatibility |

| 7 - FINISH  | 8 - MOUNTING  | 9 - OTHER OPTIONS   |
|---|---|---|
| W - White (Standard)<br>BLK* - Black<br>CC* - Custom Color (provide RAL#) | AC - Air Craft Cable (50")<br>ACP - Power Over Aircraft Cable | DC - Dual Circuit (Separate Up/Dn Control)<br>EM 120V - Emergency Pack<br>EM 277V - Emergency Pack<br>EMCKT - Emergency Circuit |

\*White cord and canopy provided. Must specify for other requests.

DATE


PROJECT

FIRM


TYPE

## PATTERNS


Patterns feature illuminated corners and angles. **Must consult factory for custom corners and patterns.**




Square Patterns



T Patterns




Custom Angles



Custom Patterns


## LENS CUT




Mitered

## ACP - 'Power Over Aircraft Cable' Option

**Individual**  
(Up to 8ft Only)

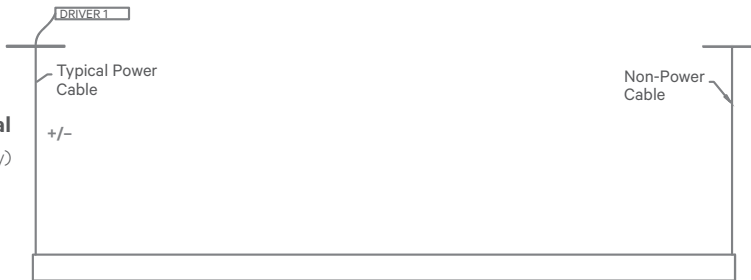

**Continuous Runs**  
Note: Configurations vary based on run lengths; consult factory

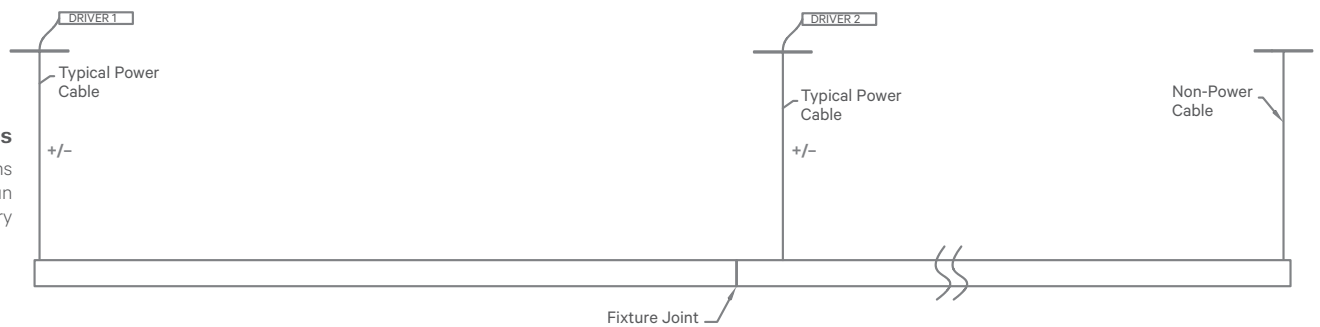

Updated: 05/15/2019