



JDSR LED

Our new perimeter system with specially designed lens angled specifically for even illumination down the wall. Cut to fit exact wall-to-wall measurements.



Features

- Cut to exact dimensions of space
- Damp Location Rated
- 90+ CRI Standard
- 5 year, 50,000 hour lamp life Warranty
- 2700k, 3000k, 3500k, 4000k, and 5000k color temperatures available

Applications

- Offices
- Lobbies
- Retail Stores
- Reception Areas
- Corridors

Details

Construction: Extruded Aluminum.

Lens: White, frosted acrylic lens.

Electrical: Integral driver with dimming. Several driver options available. See below for Lutron Dimming information:

- LTEA**=2-wire forward phase; Hi-lume 1% Dimming, only available for 120V.
- L3DA**=3-wire EcoSystem; Hi-lume 1% Dimming
- LDE1**=Digital EcoSystem; Hi-lume 1% Dimming, 'soft-on fade-to-black' (Required for Daylighting)
- LDE5**=5 Series EcoSystem; 5% Dimming.

Warranty: 5 year limited warranty; covers standard components.


Approvals: Union made, ETL listed, and manufactured in the US. Rated for Damp Location.

LED System Information

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	7.25W/ft	685Lm/ft	95Lm/W
Low (LTG2)	5W/ft	475Lm/ft	95Lm/W
High (LTG3)	8.75W/ft	815Lm/ft	93Lm/W

Please Note: Outputs reflected in chart based on 4000K color temperature. For custom LED package requests consult factory; wattages vary based on specified output. Additional photometric information available.

Extrusion Dimensions

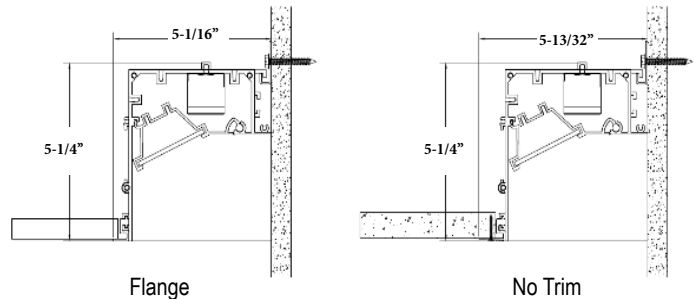

Ordering Information

JDSR LED

Series	Size	LED System	Color Temp	Voltage	Mounting	Driver	Options
	4FT	LTG1- Standard	2700K	120	F- Flange	DB- Standard 10% Dimming (0-10V)	EM-Emergency Pack
	8FT	LTG2- Low	3000K	277	NT-No Trim	DB1%-1% Dimming (0-10V)	CP-Chicago Plenum
	XFT (Continuous Row Mounting)	LTG3- High	3500K	UNV		DB.01%-01% Dimming (0-10V)	
		C- Custom Output (ie-C650Lm/ft)	4000K			LTEA*-Lutron 2-wire 1% Dimming	
			5000K			L3DA*-Lutron 3-wire 1% Dimming	
						LDE1*-Lutron Digital EcoSystem	
						LDE5*-5 Series EcoSystem; 5% Dimming	

*Refer to 'Electrical' Information Above

Ordering Example: JDSR LED-4FT-LTG1-4000K-UNV-NT-LTEA-EM