



DATE	PROJECT	FIRM	TYPE
------	---------	------	------

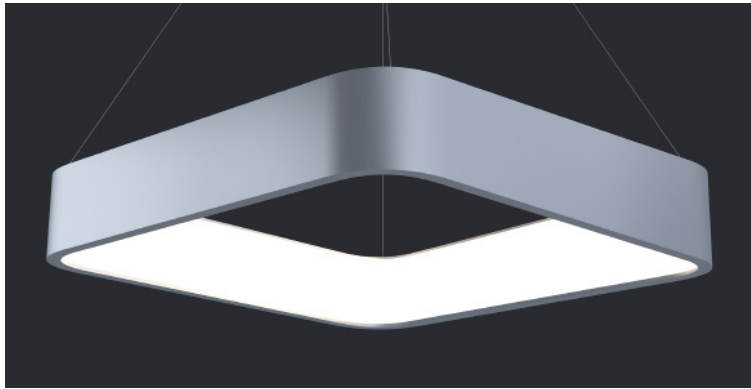


Innovative, architectural square LED luminaire providing uplight and downlight. Great for lobbies and modern office spaces. Available suspended with cable/ canopy up to 48". Custom colors available.

### FEATURES

- Custom Colors & Outputs Available
- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K & 3500K Color Temperatures Available

<b>APPLICATIONS</b>	Offices, Lobbies, Retail Stores, Reception Areas & Corridors			
<b>CONSTRUCTION</b>	Die Formed & Embossed, Heavy Gauge Cold Rolled Steel Housing.	<b>OPTICS</b>	Custom Molded Opal Lens	
<b>WARRANTY</b>	5 Year Limited Warranty (Covers Standard Components)		<b>FINISH</b>	Standard Powder-Coated White. Custom RAL Colors Available
<b>FIXTURE RATINGS &amp; CERTIFICATIONS</b>	Union Made ETL Listed	Made In The USA Damp Location Rated		
<b>ELECTRICAL</b>	Integral Driver With 0-10V 10% Dimming Standard.			

### EXTRUSION DIMENSIONS

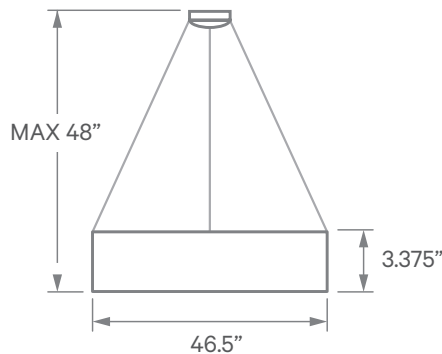

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	40 W	3,600 Lm	90 Lm/W
Low (LTG2)	36 W	3,170 Lm	91 Lm/W
High (LTG3)	49 W	4,315 Lm	88 Lm/W

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

**ORDERING**

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

<b>1 - FIXTURE ID</b> QUAD LED	<b>2 - LENGTH</b> 4 - 4 ft	<b>3 - COLOR TEMP</b> 30 - 3000K/90 CRI 35 - 3500K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K  *Must use DMX Driver (Remote)	<b>4 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER</b> DB - Standard 10% Dimming (0-10V) DMX - For Color Tuning and RGBW
<b>7 - FINISH</b> W - White (Standard) CC - Custom Color (provide RAL#)	<b>8 - MOUNTING</b> AC - Air Craft Cable (adjusts up to 48")	<b>9 - OPTIONS</b> EM 120V - Emergency Pack EM 277V - Emergency Pack			