


DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ FIRM \_\_\_\_\_ TYPE \_\_\_\_\_

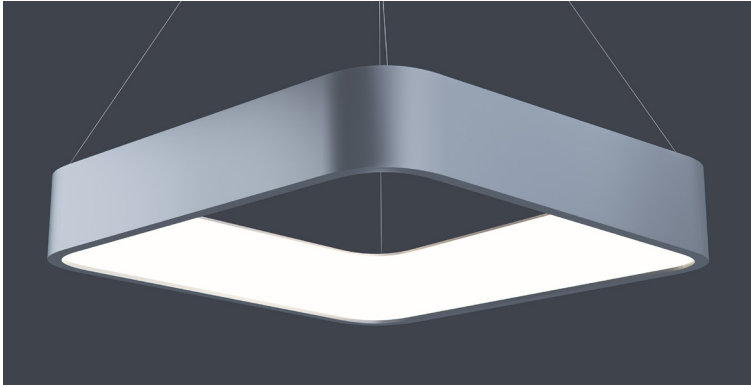

### FEATURES

- Provides 30% Uplight and 70% Direct Light Distribution
- Custom Color & Outputs Available
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE- [See More](#)

**APPLICATIONS** Offices, Lobbies, Retail Stores, Classrooms, Reception Areas, & Corridors

**FINISH** Standard Powder-Coated White. Custom RAL Colors Available

**CONSTRUCTION** Die Formed and Embossed, Heavy Gauge Cold Rolled Steel Housing

**OPTICS** Custom Molded Opal Lens




### DRIVERS, SENSORS, & POE



For Wiring Diagrams, POE, and Sensor Information Click [Here](#)

**ELECTRICAL** Integral 0-10V Dimming Driver with 'Power Over Wire' System, Eliminating Power Feed Cord By Combining The Aircraft Cable and Power Feed. Other Driver Options Remote.

### EXTRUSION DIMENSIONS

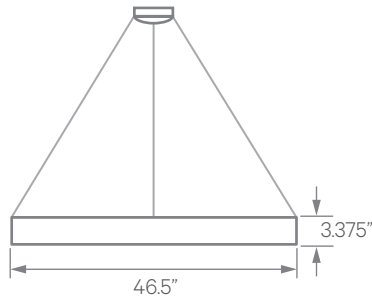

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	Nominal Efficacy
Standard (LTG1)	48 W	4,548 lm	94 LPW
Low (LTG2)	40 W	3,903 lm	97 LPW
High (LTG3)	58 W	5,330 lm	92 LPW

Based on a 90CRI, 3500K luminaire using one driver. Custom outputs available; specify below.

### ORDERING



#### 1 - FIXTURE ID

QUAD LED

#### 2 - SIZE

4 - 4 ft

#### 3 - COLOR TEMP

30 - 3000K/90 CRI  
35 - 3500K/90 CRI  
40 - 4000K/90 CRI

#### 4 - LED SYSTEM

LTG1 - Standard  
LTG2 - Low  
LTG3 - High  
LTGC - Custom Output

#### 5 - VOLTAGE

UNV - Universal (120/277V)  
347V\* - 347V  
\*Must use DB Driver

#### 6 - DRIVER

DB - Standard Dimming (0-10V)  
DB.1%\* - 0.1% Dimming (0-10V)  
ELV-TRI\* - 2-wire 1% Dimming (120V only)  
ELV and TRIAC Compatible  
LDE1\* - Lutron Digital EcoSystem  
LDE5\* - 5 Series EcoSystem; 5% Dimming  
PoE - Power over Ethernet. Consult Factory for Compatibility  
DALI\* - DALI-2 Driver  
\*Remote Driver

#### 7 - FINISH

W - White (Standard)  
BLK\* - Black  
CC\* - Custom Color (provide RAL#)

#### 8 - MOUNTING

ACP - Power Over Aircraft Cable (Standard)

#### 9 - OTHER OPTIONS

EM 120V - Emergency Pack  
EM 277V - Emergency Pack  
EMCKT - Emergency Circuit  
FC - Flat Canopy (Remote Driver)

\*White cord and canopy provided. Must specify for other requests.