


# Quad 4ft direct

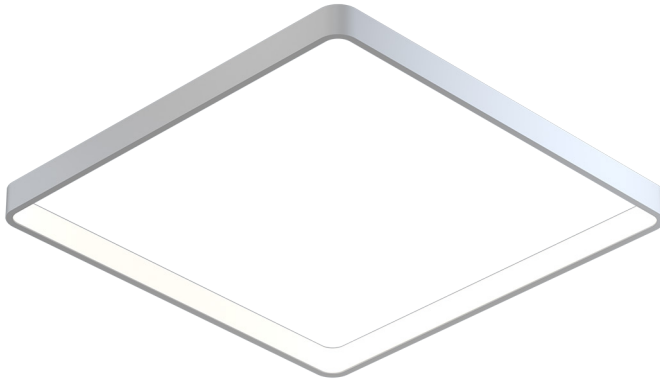


Our Performance Decorative luminaires offer a variety of decorative forms and sizes suitable for any modern space.


## Features

- Power Over Wire system eliminates power cord
- Indirect and direct light distribution
- Specifiable color temperature. CRI > 90, R9 >50
- Custom colors and wood finishes finishes available
- Specifiable dimmable drivers or PoE
- 5 Year, 50,000 hour warranty, damp location rated
- WELL Building Standard compatible [learn more](#)


## Dimensions




## Optics



low



medium



high

Representative distribution and peak candela. For other options see order information or IES files [here](#).

# Quad 4ft direct

## Ordering Information

For each option group below specify one option. If you don't see your preferred option listed, contact us for [help](#).

1	Fixture ID	2	Length	3	Color Temperature	4	Output
	<b>QUAD</b>	<b>4</b>	4 ft	<b>27</b>	2700K/90 CRI	<b>LOW</b>	Low output
				<b>30</b>	3000K/90 CRI	<b>MED</b>	Medium output
				<b>35</b>	3500K/90 CRI	<b>HIGH</b>	High output
				<b>40</b>	4000K/90 CRI	<b>CUST</b>	Custom output Specify Watts or lumens
5	Voltage	6	Driver	7	Finish	8	Mounting
<b>UNV</b>	Universal (120/277V)	<b>DB</b>	Standard 0-10V 1%	<b>W</b>	White	<b>ACP-CENT</b>	Power over aircraft cable Single canopy at the center White canopy provided unless otherwise specified in section 12.
<b>347V</b>	347V Available for DB Driver only	<b>DB.1%</b>	0-10V 0.1%	<b>BLK</b>	Black	<b>ACP-MULTI</b>	Power over aircraft cable Individual suspension points White canopies provided unless otherwise specified in section 12.
		<b>ELV</b>	Reverse Phase 1% (120V only) For compatible dimmers see <a href="#">here</a> .	<b>SLV</b>	Silver	<b>SM</b>	Surface Mount
		<b>TRI</b>	Forward phase (120V only) For compatible dimmers see <a href="#">here</a> .	<b>CC</b>	Custom Color See finish options <a href="#">here</a> .		
		<b>LDE1</b>	Lutron Digital EcoSystem	<b>CWF</b>	Custom Wood Finish See finish options <a href="#">here</a> .		
		<b>DALI</b>	DALI-2 Driver				
		<b>PoE</b>	Power over Ethernet.				
		<b>DMX</b>	DMX512 All DMX drivers set to default address 001 and provided in remote enclosures. Contact us for other addressing needs.				
9	Optics	10	Sensors/Controls	11	Circuit	12	Options
<b>SD</b>	Standard Diffuser	<b>NA</b>	None	<b>NA</b>	None	<b>STD</b>	White Canopy + White Cord
		<b>ACM</b>	Acuity nLight Module Only	<b>EMPCK</b>	Emergency battery pack May require additional power feeds.	<b>CAN-X</b>	Canopy + color See finish options <a href="#">here</a>
		<b>CCS</b>	Casambi Module	<b>EMCKT</b>	Emergency circuit May require additional power feeds.	<b>SJ-BLK</b>	Black cord
		<b>AWNR</b>	Lutron Athena Wireless Node Module	<b>DAYCKT</b>	Daylight circuit May require additional power feeds.	<b>SJ-WHT</b>	White cord
		<b>OTHER</b>	Consult Factory			<b>FC</b>	Flat Canopy Drivers provided in remote enclosure.

## Performance

Output <sup>1</sup>	Watts	Lumens
Low	40	3902
Medium	48	4547
High	58	5329

<sup>1</sup>Based on a typically configured 90 CRI, 3500K luminaire using one driver.  
Custom outputs available. Please consult factory.  
For 4000K multiply by 1.05; for 3000K, 0.96; for 2700K, 0.92.

## Technical Information



click [here](#) or  
scan QR code

Wiring diagrams, PoE and sensor details

# Quad 4ft direct

## Drivers & Electrical

Our Power Over Wire system delivers power to the luminaire via suspension cables, eliminating a separate power feed. Drivers are housed in the luminaire canopy or in factory supplied remote enclosures<sup>1</sup>. All drivers are dimmable. For remote driver box sizes, click [here](#).

<sup>1</sup>See order information for more details.

## Emergency Back-Up

Emergency, battery-powered drivers are available. Emergency circuits for use with building generators are also available.

## PoE (Power over Ethernet)

Compatible with virtually all PoE systems including Molex Coresync, Igor, Smartengine, Platformatics, and NuLED SPICEbox. Consult Factory for systems not listed, See [here](#) for more info.

## Weight

17 lbs

## Mounting

## Optics

Extruded satin acrylic lenses provide excellent diffusion, high transmission, and no LED imaging.

## Construction

Welded, extruded, recycled aluminum.

## Finishes

All luminaires are finished in high quality polyester powder coating. Our standard color is white. Any RAL color may be specified.