


DATE	PROJECT	FIRM	TYPE
------	---------	------	------




Round, 'halo'-style luminaire with 4 ft diameter. For use in indoor applications where an LED luminaire is required; great for lobbies, reception areas and corridors. Mounted with air craft cable.

### FEATURES

- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, & 4000K Color Temperatures Available

<b>APPLICATIONS</b>	Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors		
<b>CONSTRUCTION</b>	Extruded Rolled Aluminum. Ring is 2-3/4" in Width.	<b>OPTICS</b>	Laser-cut Cast High Transmission Satin Acrylic Lens with No LED imaging
<b>WARRANTY</b>	5 Year Limited Warranty (Covers Standard Components)	<b>FINISH</b>	Standard Powder-Coated White. Custom RAL Colors Available
<b>FIXTURE RATINGS &amp; CERTIFICATIONS</b>	Union Made ETL Listed	Made In The USA Damp Location Rated	
<b>ELECTRICAL</b>	Remote Driver With 0-10V 10% Dimming Standard. 0-10V 1% Dimming Optional.		

### EXTRUSION DIMENSIONS

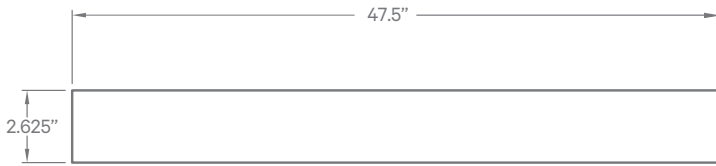

### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	62 W	3,285 Lm
Low (LTG2)	40 W	2,320 Lm
High (LTG3)	100 W	4,800 Lm

Based on a 3000K, 90CRI luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

### ORDERING



<b>1 - FIXTURE ID</b> RING LED	<b>2 - LENGTH</b> 4 - 4 ft	<b>3 - COLOR TEMP</b> 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI	<b>4 - LED SYSTEM</b> LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm)	<b>5 - VOLTAGE</b> UNV - Universal (120/277V)	<b>6 - DRIVER</b> DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V)
<b>7 - FINISH</b> W - Standard White CC - Custom Color (provide RAL#)	<b>8 - MOUNTING</b> AC - Air Craft Cable (48")	<b>9 - OPTIONS</b> EM 120V - Emergency Pack EM 277V - Emergency Pack			