


DATE _____ PROJECT _____ FIRM _____ TYPE _____

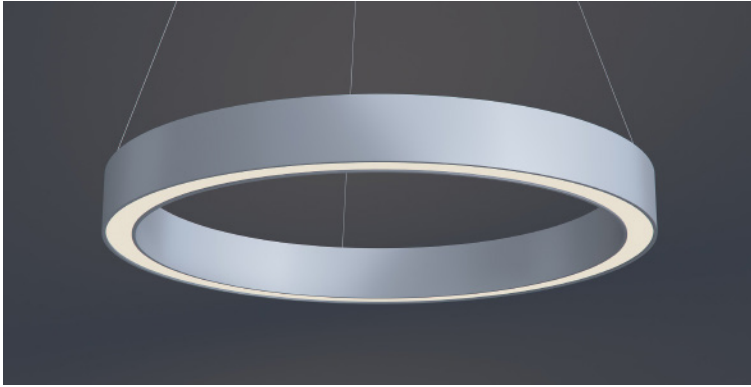

Round, 'halo'-style luminaire with 2 ft diameter providing direct and indirect lighting. For use in indoor applications where an LED luminaire is required; great for lobbies, reception areas and corridors. Mounted with air craft cable.

FEATURES

- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Extruded Rolled Aluminum | **OPTICS** Laser-cut Cast High Transmission Satin Acrylic Lens with No LED Imaging

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated



DRIVERS & SENSORS



For Wiring Diagrams and Sensor Information Click [Here](#)

ELECTRICAL Remote Driver with 0-10V Dimming Standard. 0-10V 1% Dimming Optional

EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	
		DIRECT	INDIRECT
Standard (LTG1)	65 W	1,780 lm	1,955 lm
Low (LTG2)	42 W	1,165 lm	1,285 lm
High (LTG3)	95 W	2,470 lm	2,715 lm

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING 1 2 3 **IN -** **D -** 5 6 7 8 9

1 - FIXTURE ID RING LED UPDN | **2 - SIZE** 2 - 2 ft | **3 - COLOR TEMP** 27 - 2700K/90 CRI, 30 - 3000K/90 CRI, 35 - 3500K/90 CRI, 40 - 4000K/90 CRI | **4 - LED SYSTEM** IN - INDIRECT (LTG1 - Standard, LTG2 - Low, LTG3 - High, LTGC - Custom Output), D - DIRECT (LTG1 - Standard, LTG2 - Low, LTG3 - High, LTGC - Custom Output) | **5 - VOLTAGE** UNV - Universal (120/277V)

6 - DRIVER (Remote) DB - Standard Dimming (0-10V), DB1% - 1% Dimming (0-10V), PoE - Power over Ethernet. Consult Factory for Compatibility | **7 - FINISH** W - White (Standard), BLK* - Black, CC* - Custom Color (provide RAL#), *White cord and canopy provided. Must specify for other requests. | **8 - MOUNTING** AC - Air Craft Cable | **9 - OTHER OPTIONS** EM 120V - Emergency Pack, EM 277V - Emergency Pack, EMCKT - Emergency Circuit