


DATE _____ PROJECT _____ FIRM _____ TYPE _____

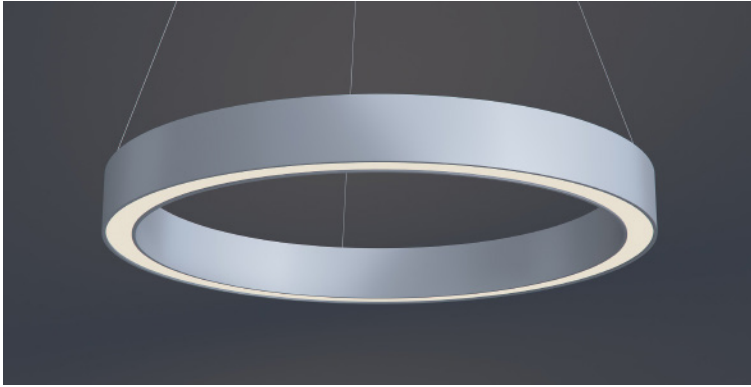

Round, 'halo'-style luminaire with 4 ft diameter providing direct and indirect lighting. For use in indoor applications where an LED luminaire is required; great for lobbies, reception areas and corridors. Mounted with air craft cable.

FEATURES

- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Extruded Rolled Aluminum **OPTICS** Laser-cut Cast High Transmission Satin Acrylic Lens with No LED Imaging

WARRANTY 5 Year Limited Warranty (Covers Standard Components) **FINISH** Standard Powder-Coated White. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed Made In The USA Damp Location Rated




DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)



ELECTRICAL Remote Driver with 0-10V Dimming Standard. 0-10V 1% Dimming Optional

EXTRUSION DIMENSIONS

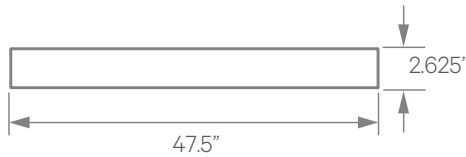

LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens	
		DIRECT	INDIRECT
Standard (LTG1)	175 W	5,880 lm	6,468 lm
Low (LTG2)	110 W	3,785 lm	4,165 lm
High (LTG3)	270 W	8,539 lm	9,386 lm

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING 1 2 3 **IN -** 4-INDIRECT **D -** 4-DIRECT 5 6 7 8 9

1 - FIXTURE ID	2 - SIZE	3 - COLOR TEMP	4 - LED SYSTEM		5 - VOLTAGE
RING LED UPDN	4 - 4 ft	27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI	IN - INDIRECT LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	D - DIRECT LTG1 - Standard LTG2 - Low LTG3 - High LTGC - Custom Output	UNV - Universal (120/277V)

6 - DRIVER (Remote)	7 - FINISH	8 - MOUNTING	9 - OTHER OPTIONS
DB - Standard Dimming (0-10V) DB1% - 1% Dimming (0-10V) PoE - Power over Ethernet. Consult Factory for Compatibility	W - White (Standard) BLK* - Black CC* - Custom Color (provide RAL#) *White cord and canopy provided. Must specify for other requests.	AC - Air Craft Cable	EM 120V - Emergency Pack EM 277V - Emergency Pack EMCKT - Emergency Circuit