


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

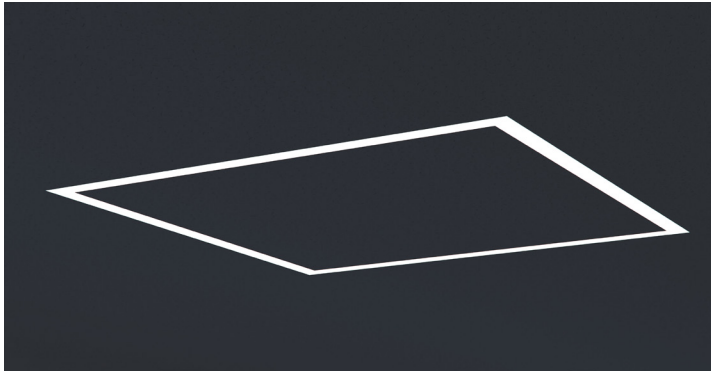

Recessed, square-patterned luminaire with small profile using either flush or pop-out lens. Available for grid and sheetrock ceilings. Custom mounting types also available; consult factory.


FEATURES

- Damp Location Rated
- CRI 90+ Standard
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K, 4000K & 5000K Color Temperatures Available
- Enlighted/Wattstopper Sensors Available
- Rated Life- 100,000 hours at L70; 50,000 hours at L90

APPLICATIONS	Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors			
CONSTRUCTION	Extruded Aluminum Housing and Steel Gear Tray.	OPTICS	Extruded High Transmission Satin Acrylic Lens With No LED Imaging. Flush or 'Pop-Out' Lens	
WARRANTY	5 Year Limited Warranty (Covers Standard Components)		FINISH	Standard Powder-Coated White. Custom RAL Colors Available
FIXTURE RATINGS & CERTIFICATIONS	Union Made ETL Listed	Made In The USA Damp Location Rated		

ELECTRICAL Remote Driver With 0-10V 10% Dimming Standard Utilizing Power Over Wire System. See Below For Optional Lutron Dimming Information

EXTRUSION DIMENSIONS

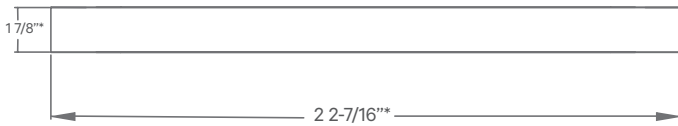

Note: Dimensions reflect fixture housing only and do not include mounting hardware. Please consult factory for dimensions based on mounting type needed.

LED SYSTEM INFORMATION

	System Watts	Delivered Lumens	Efficacy
Standard (LTG1)	55 W	4,900 Lm	89 Lm/W
Low (LTG2)	40 W	3,640 Lm	91 Lm/W
High (LTG3)	70 W	5,950 Lm	85 Lm/W

Based on a 3500K luminaire using one driver. Please consult factory for custom lumen outputs & wattage.

ORDERING

1 - FIXTURE ID SQUARE REC	2 - SIZE 2X2	3 - COLOR TEMP 27 - 2700K/90 CRI 30 - 3000K/90 CRI 35 - 3500K/90 CRI 40 - 4000K/90 CRI 50 - 5000K/90 CRI TW* - Tunable White RGBW* - RGB + 3000K *Must use DMX Driver (Remote)	4 - LED SYSTEM LTG1 - Standard LTG2 - Low LTG3 - High C - Custom Output (ie-C550Lm/ft)	5 - VOLTAGE UNV - Universal (120/277V)	6 - DRIVER DB - Standard 10% Dimming (0-10V) DB1% - 1% Dimming (0-10V) DB.01% - .01% Dimming (0-10V) LTEA - Lutron 2-wire 1% Dimming L3DA - Lutron 3-wire 1% Dimming LDE1 - Lutron Digital EcoSystem LDE5 - 5 Series EcoSystem; 5% Dimming DMX - For Color Tuning and RGBW
7 - FINISH W - White (Standard) BLK - Black CC - Custom Color (provide RAL#)	8 - MOUNTING T - 9/16" Tee Grid T15 - 15/16" Tee Grid SG - Slot Grid/Interlude F - Flange NT - No Trim, Spackle Flange	9 - CONTROL EIS - Integral Sensor by Enlighted WIS - Integral Sensor by Wattstopper	10 - OPTICS FL - Flush Lens POL - 1" Pop-out Lens	11 - OPTIONS EM 120V - Emergency Pack EM 277V - Emergency Pack	